

**Brecken Freestanding Tub**

220AS7004-60-2

**Stylish Design:**

- High-gloss acrylic 2-piece construction with fiberglass reinforcement
- Sleek contemporary styling
- Spaciously designed to provide maximum bathing space with a wide and deep bathing well
- Smooth lumbar support for increased back comfort
- Wide 5" deck for Storage and deck mounted tub filler (sold separately)
- Included color matched white drain and slotted overflow for additional soaking depth
- Coordinates with Aspirations™ bathroom suite
- Smooth lumbar support for increased back comfort
- Coordinates with Aspirations™ bathroom suite

**Easy Install and Care:**

- High-gloss surface allows easier maintenance and cleaning
- Two-piece construction allows for easier installation
- Pre-leveled tub bottom for easier installation
- Limited Lifetime warranty

**Nominal Dimensions:**

60" x 34" x 34"  
(1527 x 864 x 610mm)

**Compliance Certifications -**

**Meets or Exceeds the Following Specifications:**

- CSA B45.5 / IAPMO Z124




SEE REVERSE SIDE FOR ROUGHING-IN DIMENSIONS AND PRODUCT SPECIFICATIONS

**To Be Specified - Required:**

- Color: White

# Breken 60"x 34" Freestanding Tub

HIGH GLOSS ACRYLIC

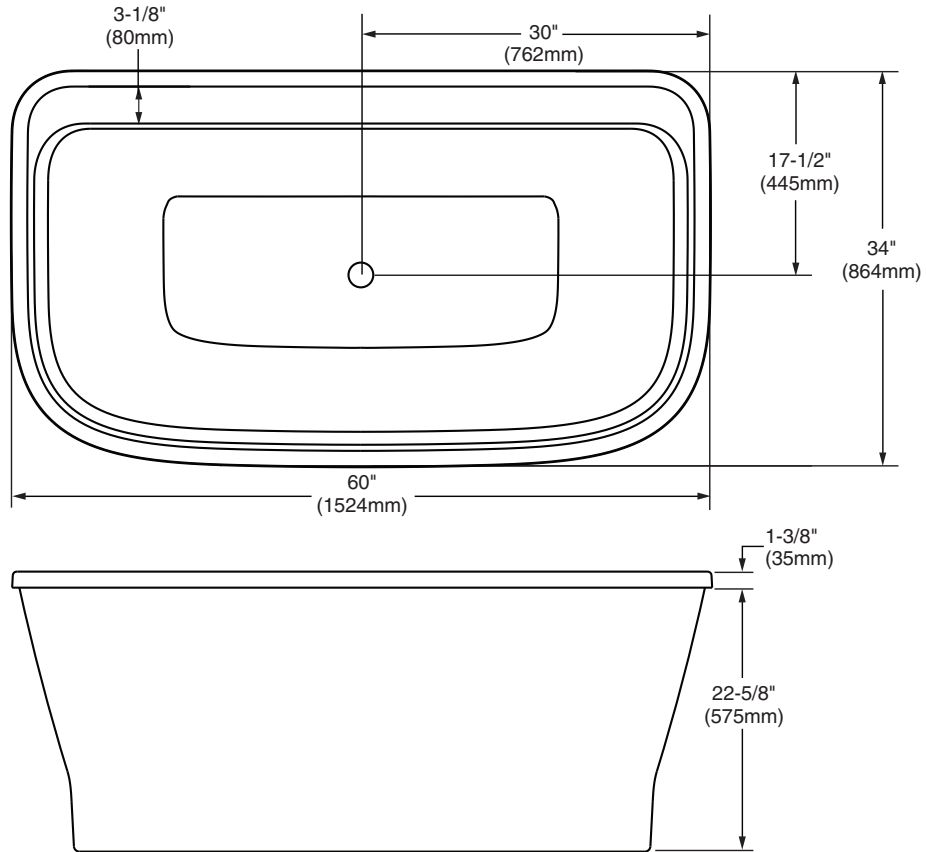

## GENERAL SPECIFICATIONS FOR TUB

INSTALLED SIZE	60 x 34 x 24 in. (TUB ONLY)
	(1524 x 864 x 610mm)
WEIGHT	106 Lbs. (48 Kg.)
WEIGHT w/WATER	698 Lbs. (317 Kg.)
GAL. TO OVERFLOW	71 Gal. (268 L)
BATHING WELL AT SUMP	41-3/8 x 20-1/4 In. (1050 x 513mm)
BATHING WELL AT RIM	53-5/8 x 26 In. (1363 x 660mm)
WATER DEPTH TO OVERFLOW	17.56 In. (446mm)
FLOOR LOADING	78.5 Lbs./Sq.Ft. (383.6 Kgs./Sq.m)
LUMBAR ANGLE	21.8 deg

### NOTES:

■ REFER TO INSTALLATION INSTRUCTIONS SUPPLIED WITH BATHTUB FOR ADDITIONAL INFORMATION.

**IMPORTANT:** Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard Z124.1. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided leaflet.