


Starck 3 Toilet wall-mounted ♿ # 2560090000

| < 14 5/8" Inch > |

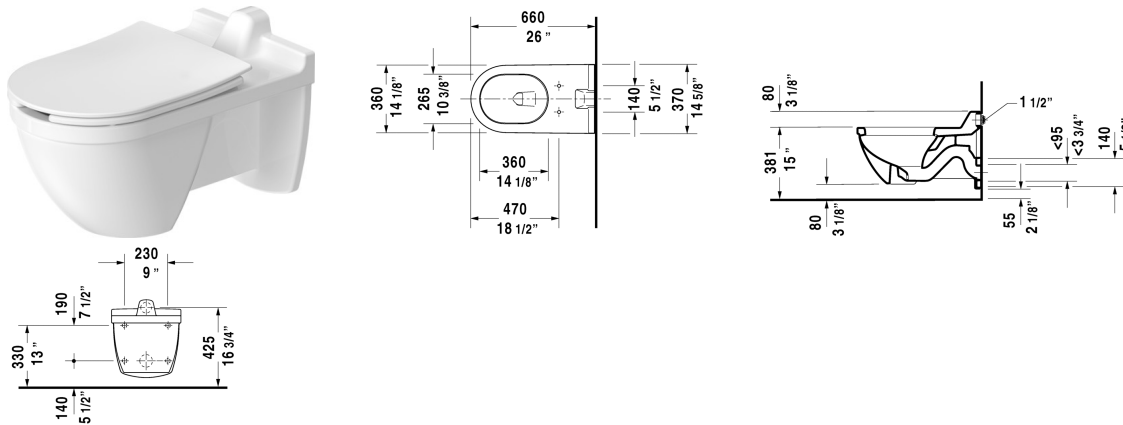

| Toilet wall-mounted | Dimension | Weight | Order number |
|---|--------------------|---------|--------------|
| concealed inlet, syphonic, includes inlet spud 1 1/2", horizontal outlet, cUPC® listed*, 1.28 gpf | | | |
| Colors | | | |
| 00 White | | | |
| Variant | | | |
| ♿ | 14 5/8" x 26" Inch | 58.4 lb | 2560090000 |
| Infobox | | | |
| * Complies with following standards: ASME A112.19.2/CSA B45.1, Wall-mounted toilet is ADA compliant, when installed with a seat height of 17" - 19" from the finished floor, Not available with WonderGliss | | | |
| Noise reduction gasket for wall-mounted toilet | | 0.7 lb | 005064 |
| Suitable products | | | |
| Toilet seat and cover open front, elongated, hinges stainless steel, without slow close, | | | 006601 |
| Toilet seat ring open front, elongated, hinges stainless steel, without slow close, | | | 006211 |

All drawings contain the necessary measurements which are subject to standard tolerances. They are stated in inch & mm and are non-binding. Exact measurements, in particular for customized installation scenarios, can only be taken from the finished ceramic piece.