






3596BTRM
Tub/Hand Shower/Shower Trim
Specification Submittal

Location:

<p>Model Numbers</p> <p><input type="checkbox"/> 3596BTRM Tub/Hand Shower/Shower Trim</p> <p>Valve Options -261 Series Temptrol® Shower Valve with TRM modifier -161 Series Temptrol Shower Valve requires TC modifiers -3DIVBODYSRT</p>	<p>Modifications</p> <ul style="list-style-type: none"> <input type="checkbox"/> 15  1.5 gpm (5.7 L/min) flow restrictor <input type="checkbox"/> 175 1.75 gpm (6.6 L/min) flow restrictor <input type="checkbox"/> Delete suffix B Chrome plastic escutcheon on valve with color graphics/indicators in place of standard brass escutcheon <input type="checkbox"/> TC Test Cap Trim (includes TA-10™ & T-12A) <i>used with 161 Series Temptrol Valve.</i> <input type="checkbox"/> L1 Less showerhead <input type="checkbox"/> L2 Less hand shower (wand only) <input type="checkbox"/> L3 Less showerhead and hand shower (head and wand only) <input type="checkbox"/> L4 Less showerhead, shower arm, and flange <input type="checkbox"/> L5 Less hand shower system (less bar/cradle, hose, wand, and elbow. <input type="checkbox"/> L7 Less handle <input type="checkbox"/> BBZ Brushed Bronze finish <input type="checkbox"/> MB Matte Black finish <input type="checkbox"/> STN Satin Nickel finish <input type="checkbox"/> 1L 1-Inch Spindle Extension
<p>Feature Highlights</p> <ul style="list-style-type: none"> • Dia Tub/Shower/Hand Shower Trim. • Requires Temptrol Pressure-Balancing Shower Valve. • 30" slide bar. • Separate three-function diverter body. • 7" tub spout. • 60" flexible metal hose. • 7-mode HydroMersion™ hand shower with Non-Positive Shutoff (NPSO). • 7-mode HydroMersion showerhead with Non-Positive Shutoff (NPSO). • Standard 2.0 gpm (7.6 L/min) flow restrictors. • Components made from metal and nonmetal materials plated in standard Polished Chrome finish. 	<p>Compliance</p> <ul style="list-style-type: none"> • ASME A112.18.1/CSA B125.1 • WaterSense 1.5 gpm (5.7 L/min) 1.75 gpm (6.6 L/min) 2.0 gpm (7.6 L/min) • Lever handle meets ADA requirements for operation <div style="display: flex; align-items: center; justify-content: flex-end;">    </div>
<p>Warranty</p> <p>Limited Lifetime - for residential installations. 10 Years - for commercial/industrial installations. Refer to www.symmons.com/warranty for complete warranty information.</p> 	

SKU Builder


Series	Finish	Modifier	Flow Rate	Trim (required)	Test Cap	1L	Final SKU
3596	STN		15	TRM			3596STN15TRM
3596B	MB	L3		TRM	TC	1L	3596BMBL3TRMTC1L

Notes: No more than two modifiers (L1-L7) permitted when ordering. Modifiers will list in numerical order.

Architectural/Engineering Specification

Symmons Dia Tub and Shower and Hand Shower System _____ Includes Dia Tub/Shower/Hand Shower Trim for the Temptrol® Pressure-Balancing Shower Valve. Features 30" slide bar, 7" tub spout, 60" flexible metal hose, 7-mode HydroMersion hand shower with NPSO, 7-mode HydroMersion showerhead with NPSO, and standard 2.0 gpm (7.6 L/min) flow restrictors. Components made from metal and nonmetal materials plated in standard Polished Chrome finish. 10-Year Commercial Warranty. Lever handle meets ADA requirements for operation. ASME A112.18.1/CSA B125.1, WaterSense 1.5 gpm (5.7 L/min), 1.75 gpm (6.6 L/min), and 2.0 gpm (7.6 L/min) compliant. Available options: 15 = 1.5 gpm (5.7 L/min) flow restrictor, 175 = 1.75 gpm (6.6 L/min) flow restrictor, Delete Suffix B = Chrome plastic escutcheon, L1 = Less showerhead, L2 = Less hand shower (wand only), L3 = Less showerhead and hand shower (head and wand only), L4 = Less shower arm and flange, L5 = Less hand shower system, L7 = Less handle, BBZ = Brushed Bronze finish, MB = Matte Black finish, STN = Satin Nickel finish, 1L = 1-Inch Spindle Extension, and TC = Test Cap Trim.

Dimensions

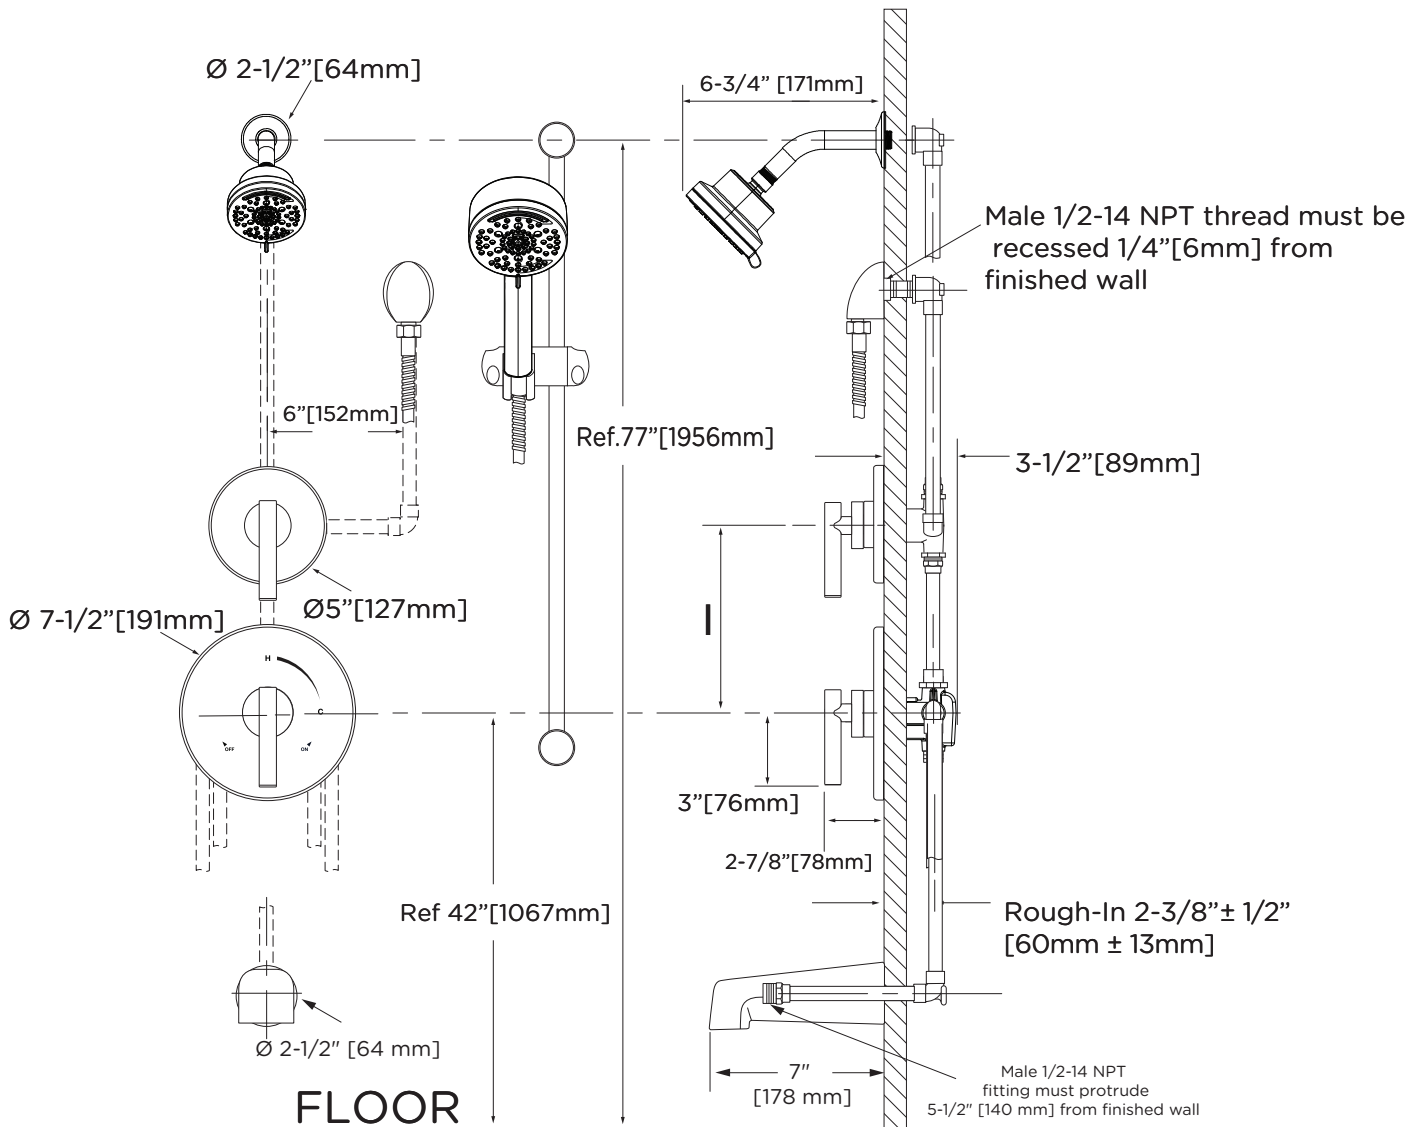

Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) from drywall, plaster, or other type walls 1/2" or greater.
- 3) All dimensions measured from nominal rough-in.
- 4) Dimensions are subject to change without notice.