







Location:



4991TRM
Shower Trim
Specification Submittal



<p>Model Numbers</p>	<p>Options/Modifications</p>
<p><input type="checkbox"/> 4991TRM Shower Trim, Temptrol Pressure Balancing Shower Valve ordered separately</p>	<p><input type="checkbox"/> MB Matte Black finish <input type="checkbox"/> STN Satin Nickel finish <input type="checkbox"/> 15 1.5 GPM (5.7 L/Min) aerator <input type="checkbox"/> L1 Less showerhead <input type="checkbox"/> L7 Less handle <input type="checkbox"/> TC With TA-10 flow control spindle + T-12A Assembly</p>
<p>Feature Highlights</p> <ul style="list-style-type: none"> Requires Temptrol® Pressure Balancing Shower Valve Metal lever handle Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap 2.0 GPM (7.6 L/min) flow rate standard 1 mode showerhead 	<p>Warranty</p> <p>Limited Lifetime - to the original end purchaser in consumer/residential installations. 10 Years - for commercial/industrial installations. Refer to www.symmons.com/warranty for complete warranty information.</p> 
<p>Compliance</p> <ul style="list-style-type: none"> ASME A112.18.1/CSA B125.1 Lever handle meets ADA requirements  	

SKU Builder

Series	Finish	Modifier	Flow Rate	Trim (required)	Test Cap	Final SKU
4991	STN	L7	15	TRM		4991STNL715TRM
4991	MB			TRM	TC	4991MBTRMTC



Note: No more than two modifiers (L1-L7) and modifier order will follow numerical order.

Architectural/Engineering Specification


Symmons _____ Includes Verity shower trim powered by the Temptrol® Pressure Balancing Showering Valve, featuring metal lever handle and 1 mode showerhead with standard 2.0 gpm (7.6 L/min) flow restrictor. Components made from metal and nonmetallic materials plated in standard polished chrome finish. 10 Year Commercial Warranty. ASME A112.18.1/CSA B125.1 compliant and lever handle meets ada requirements. Available options: "15 - 1.5 gpm (5.7 L/min) flow restrictor", "L1 - Less showerhead", "L7 - Less handle", "STN - Satin Nickel finish", "MB - Matte Black finish", "TC - Test Cap Trim".

Dimensions

2-1/2" [64mm]




6-1/4" [159mm]

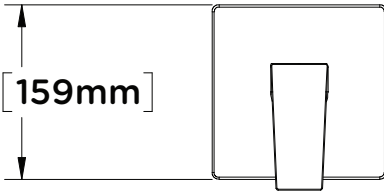

Rough-in:

2-3/8" ± 1/2" [60mm ± 13]

3-3/8" [85mm]

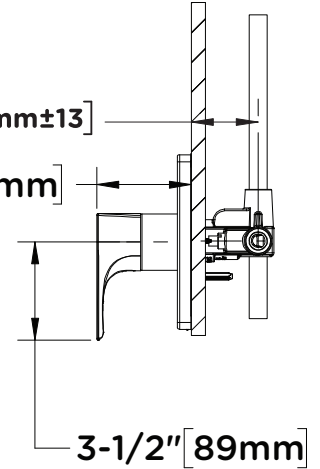

Notes:

- 1) All dimensions measured from nominal rough-in.
- 2) Dimensions are subject to change without notice.