







SYMMONS® Verity®

Location:



4993TRM
Hand Shower Trim
Specification Submittal

<p>Model Numbers</p>	<p>Options/Modifications</p>
<p><input type="checkbox"/> 4993TRM Hand Shower Trim, Temptrol Pressure Balancing Shower Valve ordered separately</p>	<p><input type="checkbox"/> MB Matte Black finish <input type="checkbox"/> STN Satin Nickel finish <input type="checkbox"/> 15 1.5 GPM (5.7 L/Min) aerator <input type="checkbox"/> L2 Less handshower (wand only) <input type="checkbox"/> L7 Less handle <input type="checkbox"/> TC With TA-10 flow control spindle + T-12A Assembly</p>
<p>Feature Highlights</p> <ul style="list-style-type: none"> Requires Temptrol® Pressure Balancing Shower Valve Metal lever handle Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap 2.0 GPM (7.6 L/min) flow rate standard 30" slide bar 60" flexible metal hose 1 mode hand shower Dual checks for back flow protection 	<p>Warranty</p> <p>Limited Lifetime - to the original end purchaser in consumer/residential installations. 10 Years - for commercial/industrial installations. Refer to www.symmons.com/warranty for complete warranty information.</p> 
<p>Compliance</p> <ul style="list-style-type: none"> ASME A112.18.1/CSA B125.1 Lever handle meets ADA requirements  	

SKU Builder


Series	Finish	Modifier	Flow Rate	Trim (required)	Test Cap	Final SKU
4993	STN	L7	15	TRM		4993STNL715TRM
4993	MB			TRM	TC	4993MBTRMTC

Note: No more than two modifiers (L1-L7) and modifier order will follow numerical order.

Architectural/Engineering Specification

Symmons _____ Includes Verity hand shower trim powered by the Temptrol® Pressure Balancing Shower Valve, featuring metal lever handles, 30" slide bar for hand shower wand, dual checks for back flow protection, 60" flexible metal hose, 1 mode hand shower wand, components shall be metal and nonmetallic construction, and is plated in standard Polished Chrome finish. 10 Year Commercial Warranty. ASME A112.18.1/CSA B125.1 compliant and lever handle meets ADA compliance. Available options: "15 - 1.5 gpm (5.7 L/min) flow restrictor", "L2 - Less hand shower", "L7 - Less handle", "STN - Satin Nickel finish", "MB - Matte Black finish", "TC - Test Cap Trim".

Dimensions

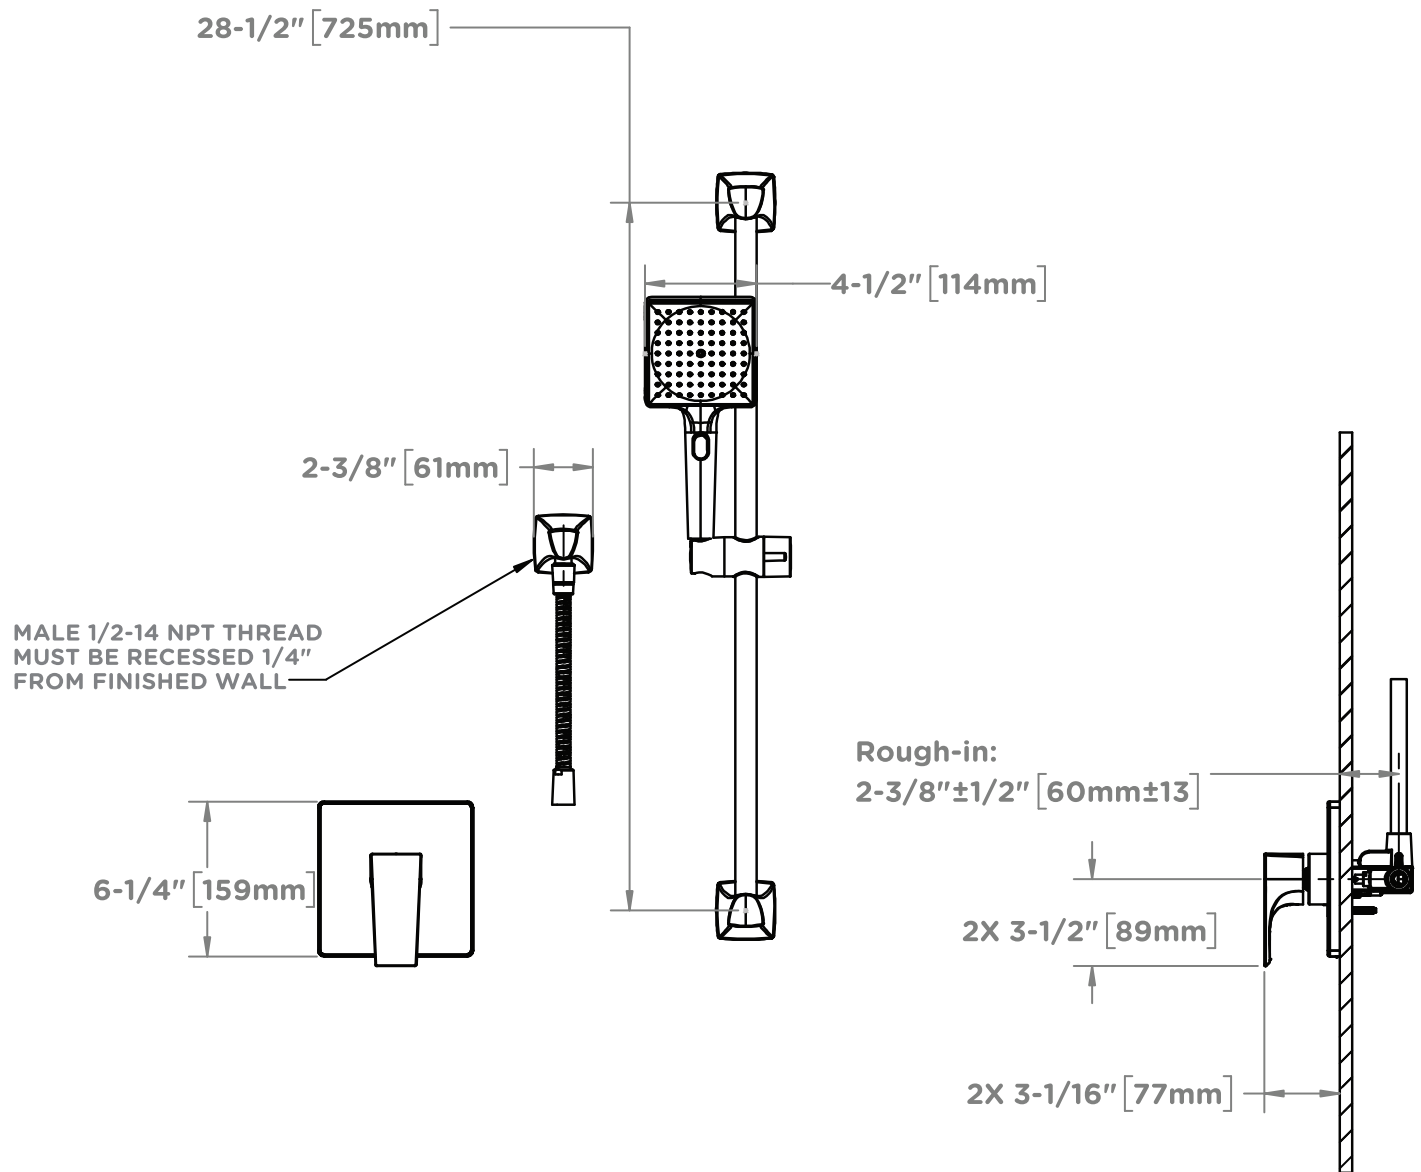

Notes:

- 1) All dimensions measured from nominal rough-in.
- 2) Dimensions are subject to change without notice.