

6796TRM  
Tub/Shower/Hand Shower Trim  
**Specification Submittal**

Location:

**Model Numbers**

- 6796TRM**  
Tub/Shower/Hand Shower Trim

**Valve Options:**

- 261 Series Temptrol® Shower Valve with TMR modifier
- 161 Series Temptrol Shower Valve requires TC modifiers
- 3DIVBODYSRT Diverter Body, 4-Port

**Feature Highlights**

- Identity Tub/Shower/Hand Shower Trim.
- Requires Temptrol® Pressure-Balancing Shower Valve.
- Separate three-function diverter.
- Metal lever handle.
- Cradle for hand shower wand.
- Dual checks for backflow protection.
- 60" flexible metal hose.
- 5-1/2" tub spout.
- Single-mode HydroMersion™ hand shower wand with Non-Positive Shutoff (NPSO).
- Single-mode HydroMersion showerhead.
- Standard 2.0 gpm (7.6 L/min) flow restrictors.
- Components shall be metal and nonmetal construction, plated in standard Polished Chrome finish.

**Compliance**

- ASME® A112.18.1/CSA® B125.1
- WaterSense® 1.5 gpm (5.7 L/min) 2.0 gpm (7.6 L/min)
- Lever handle and hand shower wand meets ADA requirements for operation.



**Options/Modifications**

- 15** 1.5 gpm (5.7 L/min) flow restrictor
- L1** Less showerhead
- L2** Less hand shower wand
- L3** Less showerhead and hand shower (head and wand only)
- L4** Less head, arm, and flange
- L5** Less hand shower system (less cradle, hose, wand, and elbow)
- L7** Less handle
- TC** Test Cap Trim (includes TA-10™ & T-12A) used with 161 Series Temptrol Shower Valve
- BBZ** Brushed Bronze finish
- MB** Matte Black finish
- STN** Satin Nickel finish

**Warranty**

**Limited Lifetime** - for residential installations.  
**10 Years** - for commercial/industrial installations.  
Refer to [www.symmons.com/warranty](http://www.symmons.com/warranty) for complete warranty information.



**SKU Builder**


Series	Finish	Modifier	Flow Rate	Trim (required)	Test Cap	Final SKU
6796	MB	L1		TRM	TC	6796MBL1TRMTC
6796	BBZ	L7	15	TRM		6796BBZL715TRM

**Notes:** No more than two modifiers (L1-L7) permitted when ordering. Modifiers will list in numerical order.

**Architectural/Engineering Specification**

Symmons Identity Tub and Shower and Hand Shower Trim \_\_\_\_\_ Includes Identity Tub/Shower/Hand Shower Trim for Temptrol Pressure-Balancing Shower Valve. Separate three-function diverter. Features metal level handle, cradle for hand shower wand, dual checks for backflow protection, 60" flexible metal hose, 5-1/2" tub spout, single-mode HydroMersion hand shower wand with NPSO, single-mode HydroMersion showerhead, and standard 2.0 gpm (7.6 L/min) flow restrictors. Components shall be metal and nonmetal construction, plated in standard Polished Chrome finish. 10-Year Commercial Warranty. ASME A112.18.1/CSA B125.1, WaterSense 1.5 gpm and 2.0 gpm compliant. Lever handle and hand shower wand meets ADA requirements for operation. Available options include: 15 = 1.5 gpm (5.7 L/min) flow restrictor, L1 = Less showerhead, L2 = Less hand shower wand, L3 = Less showerhead and hand shower wand, L4 = Less showerhead, shower arm, and flange, L7 = Less handle, TC = Test Cap Trim, BBZ = Brushed Bronze finish, MB = Matte Black finish, and STN = Satin Nickel finish.

# Dimensions

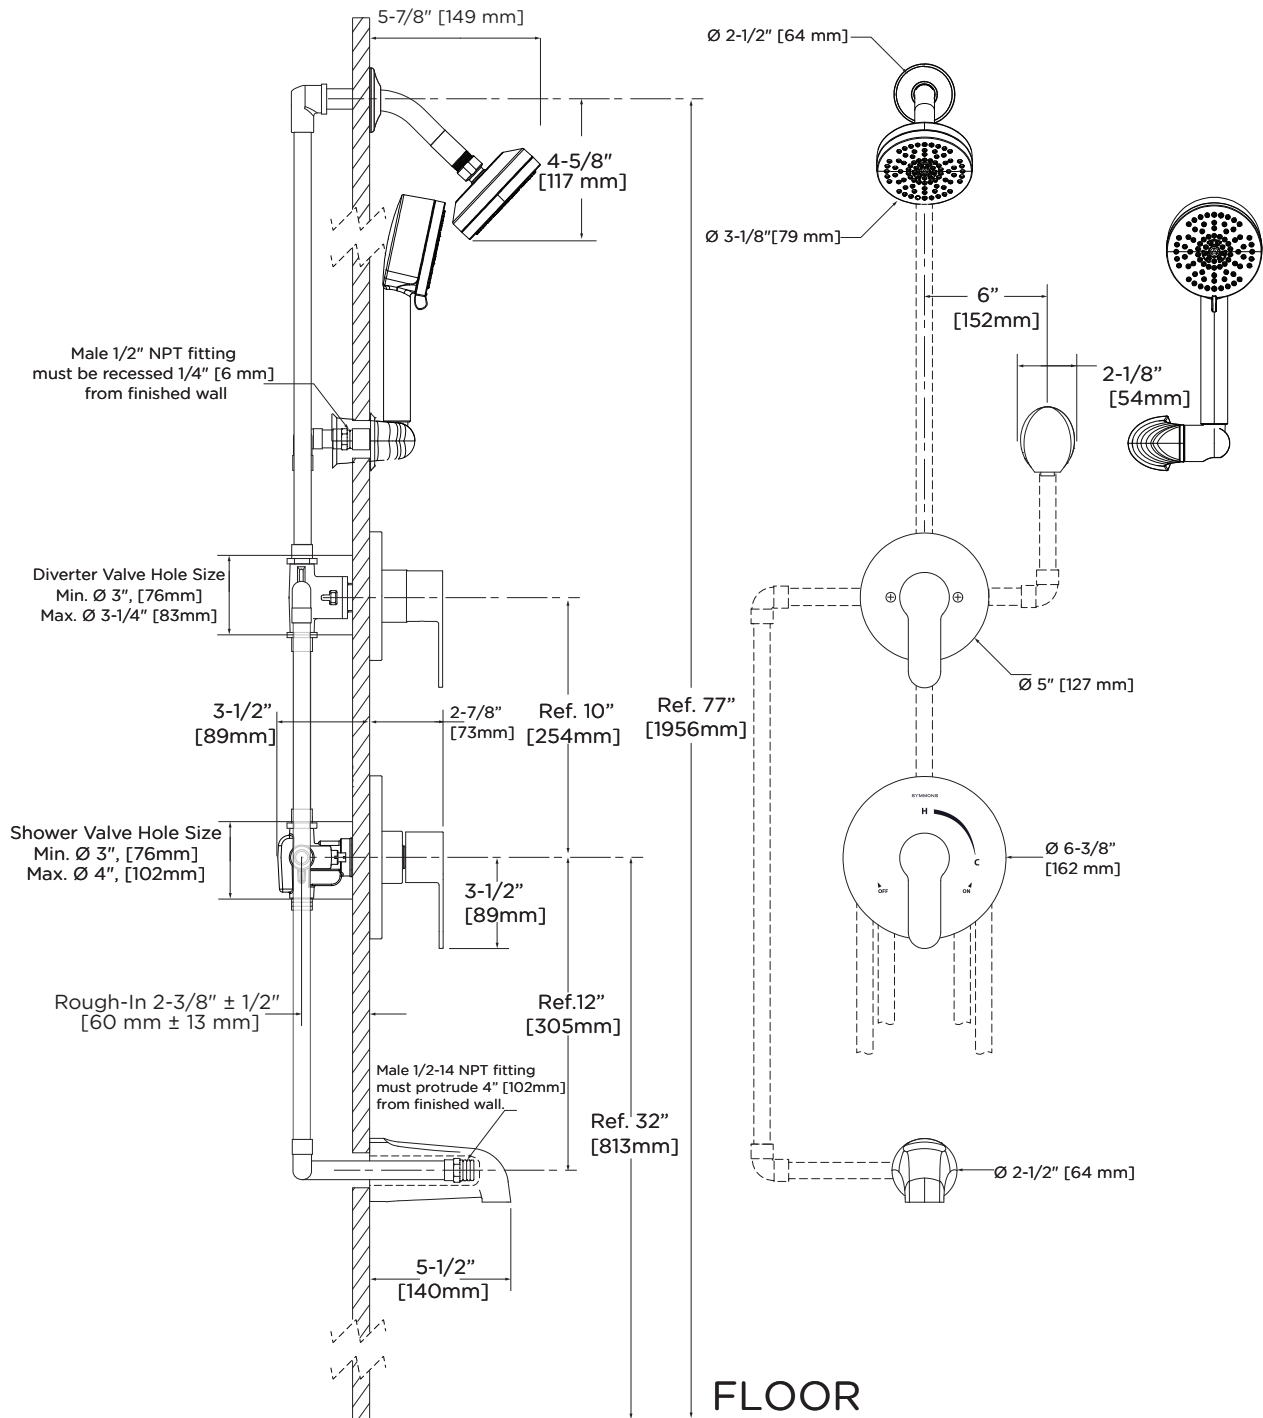

## Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) for drywall, plaster, or other type walls 1/2" or greater.
- 3) All dimensions measured from nominal rough-in.
- 4) Dimensions subject to change without notice.