

Ellis Harper Semi-Flush Mount

7713702 | 1.0

GENERATION LIGHTING

CEILING**CAUTION - RISK OF FIRE**

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.

Incandescent version may be dimmed with a standard incandescent dimmer. LED version may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.


This instruction shows a typical installation.

GENERATION LIGHTING

7400 Linder Ave, Skokie, IL 160077**800.969.3347****www.generationlighting.com**


© 2019 Generation Lighting. All rights reserved.

The "Generation Lighting" graphic is a registered trademark of Generation Lighting. Generation Lighting reserves the right to change specifications for product improvements without notification.

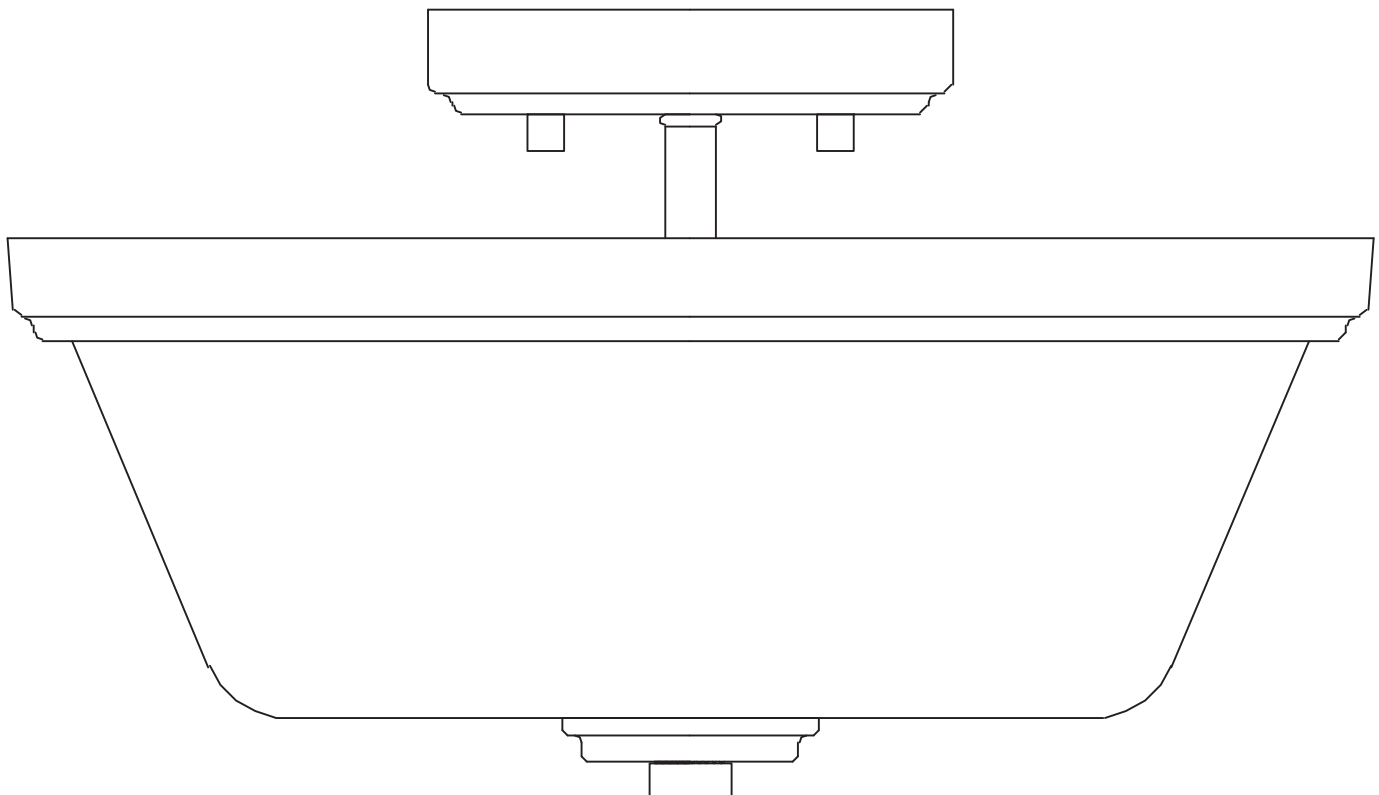**SAVE THESE INSTRUCTIONS!**

Install the Fixture

1A

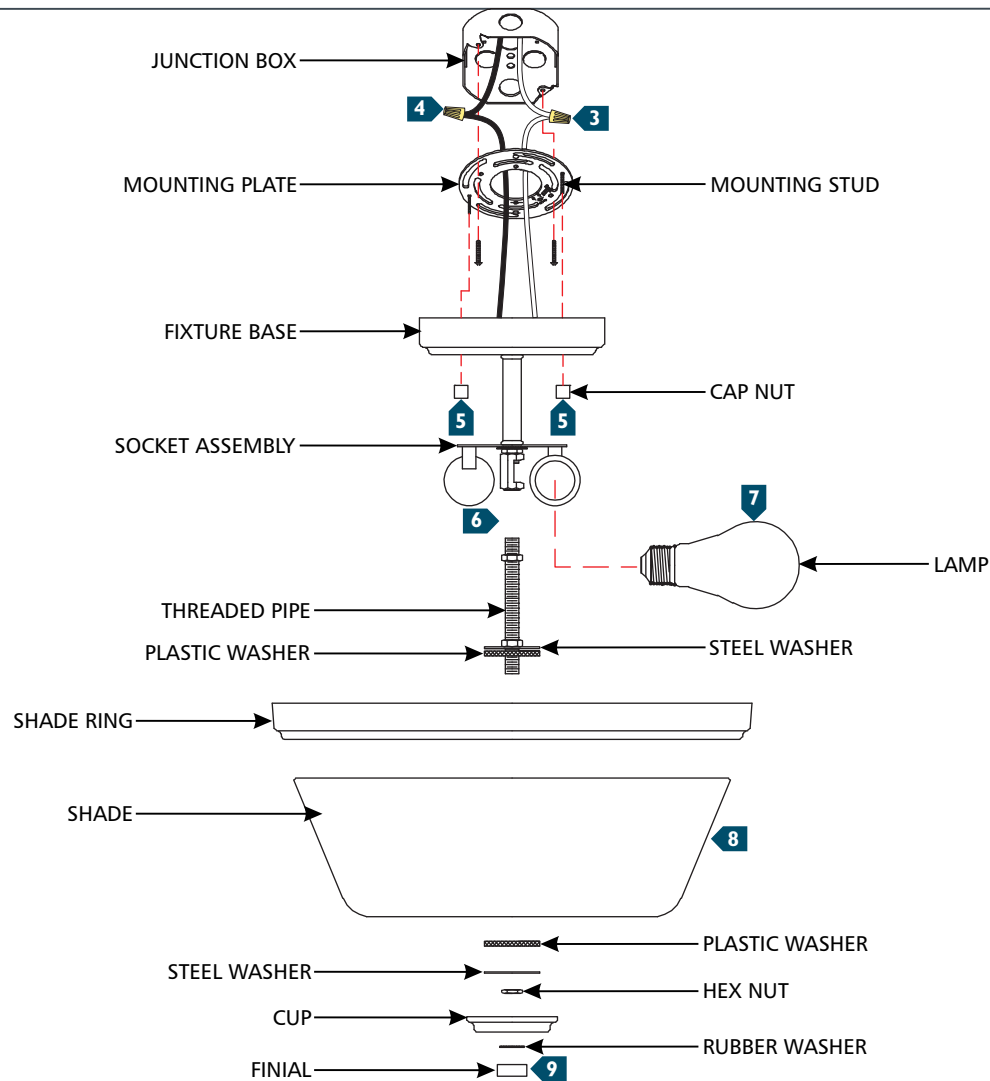

- 1** Secure the mounting plate to the junction box.
- 2** Connect the fixture to a suitable ground in accordance to local electrical codes.
- 3** Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 4** Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- 5** Neatly place all the wires into the junction box, place the canopy onto the mounting studs, and secure it in place by screwing the cap nuts onto the studs.
- 6** Screw the threaded pipe to the bottom of the socket assembly.
- 7** Screw the lamps into the sockets. Refer to the label on the socket for Max Wattage Information.
- 8** Place the steel washer, plastic washer, shade ring, shade, plastic washer, and steel washer (in that order) onto the threaded pipe, then secure them in place by screwing the hex nut onto the pipe.
- 9** Place the cup and rubber washer onto the pipe, then secure them in place by screwing the finial onto the pipe.