

Installation Instructions

CAUTION: FAILURE TO INSTALL THIS FIXTURE PROPERLY MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH AND PROPERTY DAMAGE. We recommend installation by a licensed electrician.

This product must be installed in accordance with applicable installation code(s), by a person familiar with the construction and operation of the product and the hazards involved.*

Caution: Do not exceed maximum wattage noted on fixture. Use only recommended bulbs with fixture.

To Assemble Fixture (Figures 1 & 2)

Components

- A Canopy
- B Clutch (2)
- C Clutch sleeve (2)
- D Set screw (2)
- E Canopy pipe (2)
- F Fixture pipe (2)


1. Carefully unpack the fixture from the carton.
2. Thread the wires from the fixture pipe (F) into and through the canopy pipe (E) up through the canopy (A). Depending on the fixture, the canopy pipe may be the larger or the smaller diameter of the two.
3. Unscrew the clutch (B) from the larger diameter pipe (either E or F); slide it across the wires and onto the smaller diameter pipe (either E or F). Follow this with the clutch sleeve (C), so it nests in the clutch (B). Slide the smaller pipe (E or F) as far as necessary to give you the total length of the fixture which you desire. Be careful not to scratch the pipe surfaces and to pull excess wire up through the canopy (A). **There must be a minimum 1-1/2" of inner pipe inside the outer pipe.** Hand-tighten the clutch to temporarily hold this adjustment. **At this point the adjustment is not securely fastened; do not depend on it to hold the fixture.**

Important: To ensure full connection strength, be sure the tapered end of the plastic clutch sleeve is oriented toward the clutch when assembled and securely tighten set screw.


See Figure 3.

4. **Stop.** Please see installation instructions below.
5. Once the fixture is fastened to the ceiling, tighten the set screw (D) firmly with hex wrench provided. Only after the set screw (D) is tight should you install the glass.

Note: Fixtures with more than one set of pipes will need to be leveled. Leave one clutch firmly locked with the set screw tightened. Loosen the other clutch. Raise or lower the pipe to obtain plum and level and then tighten the clutch and set screw.

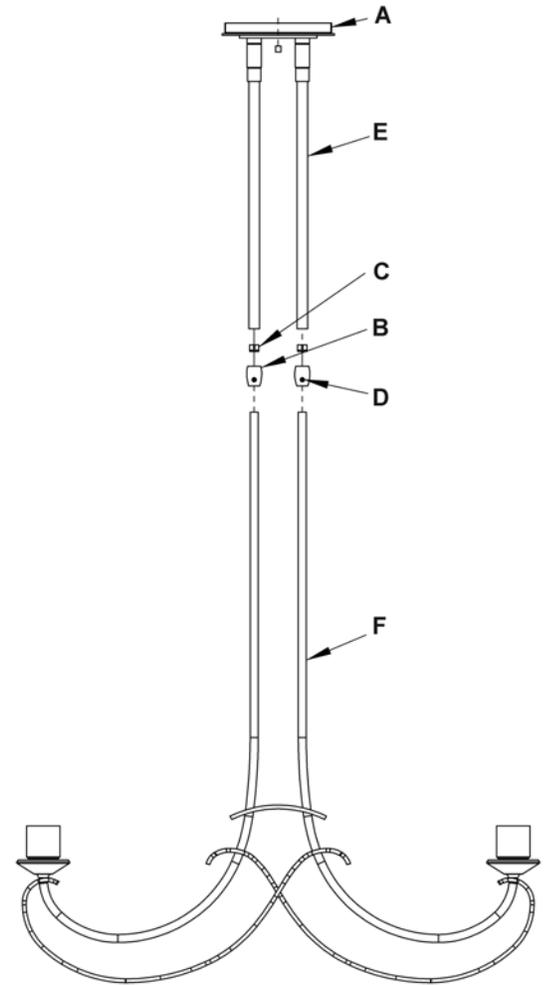

(Figure 1)

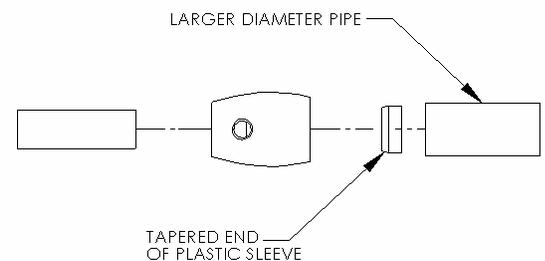

(Figure 2)

(continued)

Installation Instructions

For Almost Infinity Pendant with Duet Shades 13-1224 & 13-1234

A78

Page 2 of 3

To Install Fixture (Figure 3)

Component Parts

- | | | | |
|---|----------------|---|----------------|
| A | Canopy | I | Threaded Knobs |
| G | Crossbar | J | Ground screw |
| H | Threaded studs | | |

Caution: Be sure power is off at the main breaker box prior to installation


1. Thread studs (H) through appropriate holes in the crossbar (G) to match hole centers on canopy (A). Move ground screw (J) to another available threaded hole if necessary.
2. Using two machine screws (not provided) fasten the crossbar (G) to the electric box using outer oval slots to orient fixture to desired hanging position.

Note: A new electric box comes with screws. When replacing a fixture, retain the existing screws for use with the new fixture.

4. Using suitable wire connectors (not provided) connect fixture wires to supply (white to white and black to black). Run a pigtail lead from crossbar ground screw (J) to the junction box and connect all ground wires (bare copper or green to bare copper or green).

Caution: Make sure wire connectors are twisted on securely, and no bare wire is exposed.

5. Slide fixture canopy (A) with fixture attached, over threaded studs (H) and push firmly to ceiling making sure that no wires are pinched between fixture canopy and ceiling. Fasten with the threaded knobs (I). Be sure studs (H) are fully seated in the threaded knobs (I).
6. Install light bulb(s) (not included).
7. Install Glass Diffusers and Shades (see instructions following).

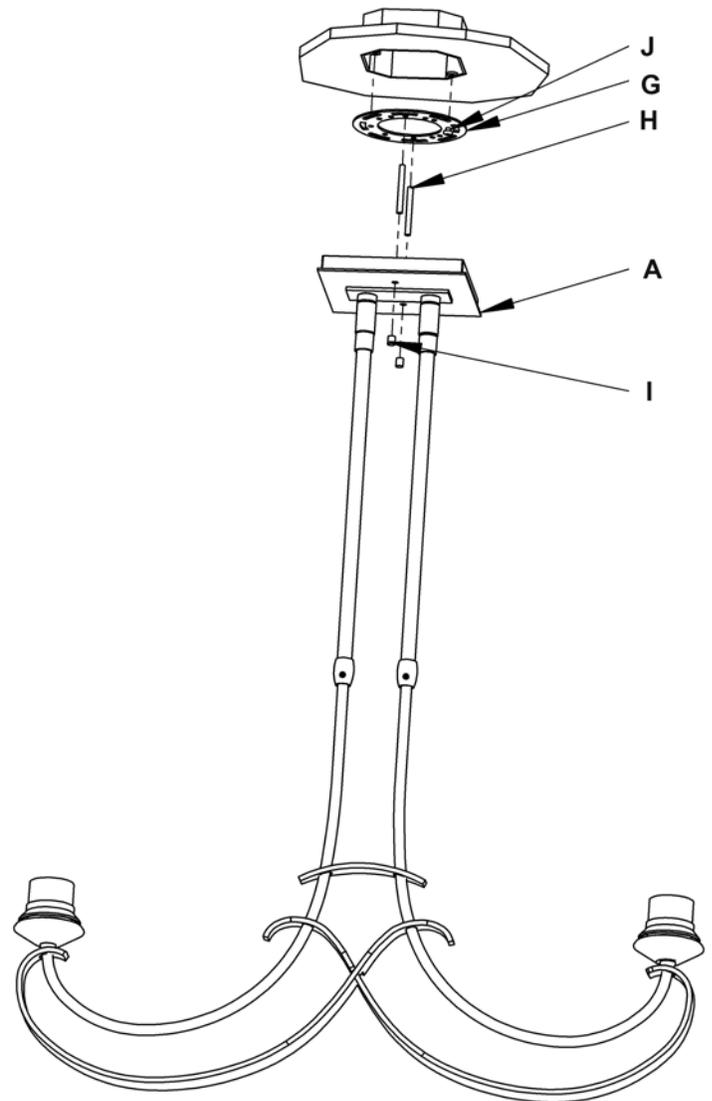

(Figure 3)

(continued)

Installation Instructions

For Almost Infinity Pendant with Duet Shades 13-1224 & 13-1234

A78


Page 3 of 3

To Install Glass Diffusers & Shades (Figure 4)

Component Parts

- K Shade Clip (6)
- L Shade Spider (2)
- M Glass (2)
- N Shade (2)

1. Attach the (3) shade clips (K) to shade spider (L) leaving clearance for the edge of the glass (M). Shade clip should push onto first curved area of spider (L).
2. Place shade (N) so that shade spider (L) rests on top edge of glass (M).
3. Slide shade clips (K) out towards edge of glass (M) equally to center the shade (N). Slide clips until the notch engages with the top edge of the glass.
4. Repeat with other shade.
5. Restore electricity at main breaker box.

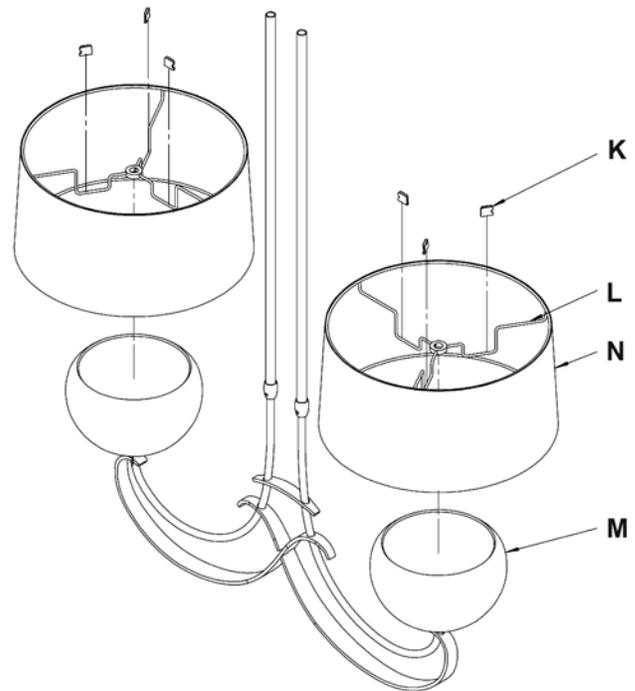

(Figure 4)

If you need further assistance, or find that you are missing any parts, please contact the dealer from which you purchased this product. We hope you enjoy your fixture!

* Hubbardton Forge will not be liable for injury or damage caused by improper installation, lamping or use of this fixture.