


ROBOTO 62" Ceiling Fan

FR-W1910-62

MODERN FORMS
SMART FANS

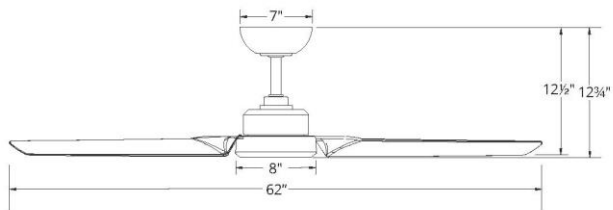

PRODUCT DESCRIPTION

Like all our smart fans, Roboto is Wet Rated to be perfect for indoor and outdoor applications. Two size options are available to complete any deck, pergola, room or living space. The quiet DC motor is 70% more efficient than AC motors, and our free Modern Forms app lets you control fan speed, set schedules, and integrate with smart home devices.

SPECIFICATIONS

Construction: Aluminum
Blade: 14° Pitch, 62" sweep, ABS
Downrod: 1" O.D. x 6" included
Mounting Slope: Up to 30°
Lead Wire: 80"
Hanging Weight: 13 lbs
Total Power: 34W
Standards: ETL/cETL Wet Location listed

FEATURES

- 6 fan speeds through both Summer and Winter Modes
- Silent DC motor
- Includes RF wall control
- Additional RF wall control for 3, 4-way control sold separately
- Compatible with Modern Forms app

ESTIMATED AIR PERFORMANCE

Airflow: 6384 cubic ft per minute on high
Power: 34 watts on high
Airflow Efficiency: 188 cubic ft per minute per watt
Revolutions Per Minute: 140 RPMs on high/91 RPMs on average

WIRELESS PERFORMANCE

RF Pairing Distance: Up to 30 ft from fan
Wi-Fi Range: Up to 150 ft*

ORDER NUMBER

Model	Housing	Blade
FR-W1910-62	BA <i>Brushed Aluminum</i>	TT <i>Titanium Silver</i>
	MW <i>Matte White</i>	MW <i>Matte White</i>
	MB <i>Matte Black</i>	MB <i>Matte Black</i>

Example: **FR-W1910-62-MB/MB**

*Results may vary based on application and surroundings.



modernforms.com
Phone (866) 810.6615
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122






Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91760

ROBOTO 62" Ceiling Fan

FR-W1910-62L

MODERN FORMS SMART FANS

OPTIONAL ACCESSORIES

RF Wall Control 	F-WC WT White	Control fan speed, light brightness and switch between Summer and Winter Modes from up to 30 ft away. One RF Wall control comes standard with each Modern Forms Smart fan.														
Wi-Fi Touch Panel Wall Control 	F-TS BK Black WT White	Sold separately. Android tablet comes pre-loaded with Modern Forms app, Wi-Fi range up to 150 ft from router. Results may vary based on application/surroundings.														
Downrod 	<table border="0"> <tr><td>XF-12</td><td>12in</td></tr> <tr><td>XF-18</td><td>18in</td></tr> <tr><td>XF-24</td><td>24in</td></tr> <tr><td>XF-36</td><td>36in</td></tr> <tr><td>XF-48</td><td>48in</td></tr> <tr><td>XF-60</td><td>60in</td></tr> <tr><td>XF-72</td><td>72in</td></tr> </table>	XF-12	12in	XF-18	18in	XF-24	24in	XF-36	36in	XF-48	48in	XF-60	60in	XF-72	72in	All our downrods are 1" O.D. and are threaded on the motor end to create an extra layer of security and allow for adjustments in the field.
XF-12	12in															
XF-18	18in															
XF-24	24in															
XF-36	36in															
XF-48	48in															
XF-60	60in															
XF-72	72in															
Downrod Couplers 	XF-I	Connects two downrods together.														
Sloped Ceiling Kit 	XF-SCK AS Automotive Silver BZ Bronze CFI Carbon Fiber** DW Dark Walnut GB Gloss Black GH Graphite GW Gloss White MB Matte Black MW Matte White OB Oil Rubbed Bronze SS Stainless Steel TT Titanium Silver	Designed to accommodate buildings with steeper sloped ceilings up to 45° or 12/12 pitch.														

Examples: RF Wall Control - **F-WC-WT**, Wi-Fi Touch Panel - **F-TS-WT**, Downrod - **XF-12-BZ**, Downrod Coupler - **XF-I-BZ**, Sloped Ceiling Kit - **XF-SCK-DW**

NOTE: Recommended maximum downrod length of 72" with 80" lead wire.

**Carbon Fiber downrods available in 12", 18", 24" and 36"

SUGGESTED DOWNROD HEIGHT USAGE

Ceiling Height	15'	14'	13'	12'	11'	10'	9'
Downrod	72"	60"	48"	36"	24"	18"	12"

SLOPED CEILING DEGREE CONVERSION CHART

Degree	4-8°	9-13°	14-17°	18-21°	22-25°	26-29°	30-32°	33-35°	36-38°	39-41°	42-44°	45°
Ceiling Slope Pitch	1/12 pitch	2/12 pitch	3/12 pitch	4/12 pitch	5/12 pitch	6/12 pitch	7/12 pitch	8/12 pitch	9/12 pitch	10/12 pitch	11/12 pitch	12/12 pitch

Supplied mounting brackets allow mounting on ceiling slopes up to 30° (7/12 pitch). Optional slope kit allows mounting on ceilings up to 45° (12/12 pitch). The receiver will mount inside canopy up to 45°.

modernforms.com
Phone (866) 810.6615
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122

Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91760