

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Bossa Nova

Pendant 3000K

Model & Size	Color Temp & CRI	Finish	Watt	LED Lumens	Delivered Lumens	Title 24
PD-93838 38"	3000K 90	BK Black	66W	5389	4391	Yes

Example: **PD-93838-BK**

DESCRIPTION

With its contrast of simple shapes, Bossa Nova captures the formal energy of Mid-Century modernism, but adds a high-tech twist with cutting-edge LED light and an installation-friendly design.

FEATURES

- Easy to assemble design with quick wiring connector
- Three 12" and one 6" downrods included for customized length
- Can be mounted on a sloped ceiling
- Driver concealed within the canopy
- 5 year warranty

SPECIFICATIONS

Color Temp:	3000K
Input:	120-277 VAC, 50/60Hz
CRI:	90
Dimming:	ELV: 100 - 10%, 0-10V: 100 - 5%
Rated Life:	50000 Hours
Mounting:	Heavy gauge retention clips support trim firmly. Safety cabling standard.
Standards:	ETL, cETL, Title 24 JA8-2016 Compliant Damp Location Listed
Construction:	Steel body with mouth-blown opal glass shade

REPLACEMENT PARTS

- RPL-GLA-93804 - Glass
- RPL-ROD-OUT06-BK - 6" rod - BK finish
- RPL-ROD-OUT12-BK - 12" rod - BK finish




FINISHES



Black

LINE DRAWING



Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Bossa Nova

Pendant 3000K

Model & Size	Color Temp & CRI	Finish	Watt	LED Lumens	Delivered Lumens	Title 24
PD-93854 54"	3000K 90	BK Black	88W	7394	6158	Yes

Example: **PD-93854-BK**

DESCRIPTION

With its contrast of simple shapes, Bossa Nova captures the formal energy of Mid-Century modernism, but adds a high-tech twist with cutting-edge LED light and an installation-friendly design.

FEATURES


- Easy to assemble design with quick wiring connector
- Three 12" and one 6" downrods included for customized length
- Can be mounted on a sloped ceiling
- Driver concealed within the canopy
- 5 year warranty

SPECIFICATIONS

Color Temp:	3000K
Input:	120-277 VAC, 50/60Hz
CRI:	90
Dimming:	ELV: 100 - 10%, 0-10V: 100 - 5%
Rated Life:	50000 Hours
Mounting:	Heavy gauge retention clips support trim firmly. Safety cabling standard.
Standards:	ETL, cETL, Title 24 JA8-2016 Compliant Damp Location Listed
Construction:	Steel body with mouth-blown opal glass shade

REPLACEMENT PARTS

- RPL-GLA-93804 - Glass
- RPL-ROD-OUT06-BK - 6" rod - BK finish
- RPL-ROD-OUT12-BK - 12" rod - BK finish

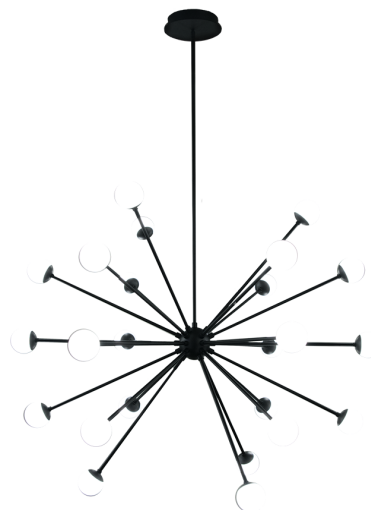

FINISHES



Black

LINE DRAWING

