

**64" x 38" (60" x 34" Clear)
ADA SOLID SURFACE SHOWER BASE**

- D14-6438AM-FCOL Barrier Free Front Center Drain with Trench Cover



Product Features:

- Durable 100% solid, non-porous material
- Smooth matte surface
- Integral 3-sided 1" tiling / water retention flange for easy installation
- Repairable and renewable surface
- Fungi and bacterial resistant
- Self-extinguishing
- UV resistant
- Resistant to stains and impact
- Easy maintenance and cleaning
- Barrier Free compliant when installed according to Barrier Free guidelines
- Drain not included

SEE REVERSE SIDE FOR ROUGHING-IN DIMENSIONS

Nominal Dimensions:

64" x 38" x 1-3/8"
(1626 x 965 x 34mm)

Shower Base Includes:

- Removable Brushed Stainless Steel trench drain cover

Compliance Certifications -

Meets or Exceeds the Following Specifications:

- CSA B45.5 / IAPMO Z124
 - IAPMO R&T cUPC
 - ICC A117.1
 - Class A rating per ASTM E84 tunnel test
- | | | |
|--------------|--------------|--------------|
| | <u>Flame</u> | <u>Smoke</u> |
| ASTM E84-17a | 0 (Zero) | 20 |
- Tested against CAN/ULC S102.2-10
- | | | |
|-------------------|--------------|--------------|
| | <u>Flame</u> | <u>Smoke</u> |
| CAN/ULC S102.2-10 | 0 (Zero) | 15 |


To Be Specified - Required

- Colour: (speciy American Standard fixture color)



BARRIER FREE

**D14-6438AM-FCOL
Barrier Free Front Center Drain
with Trench Cover**

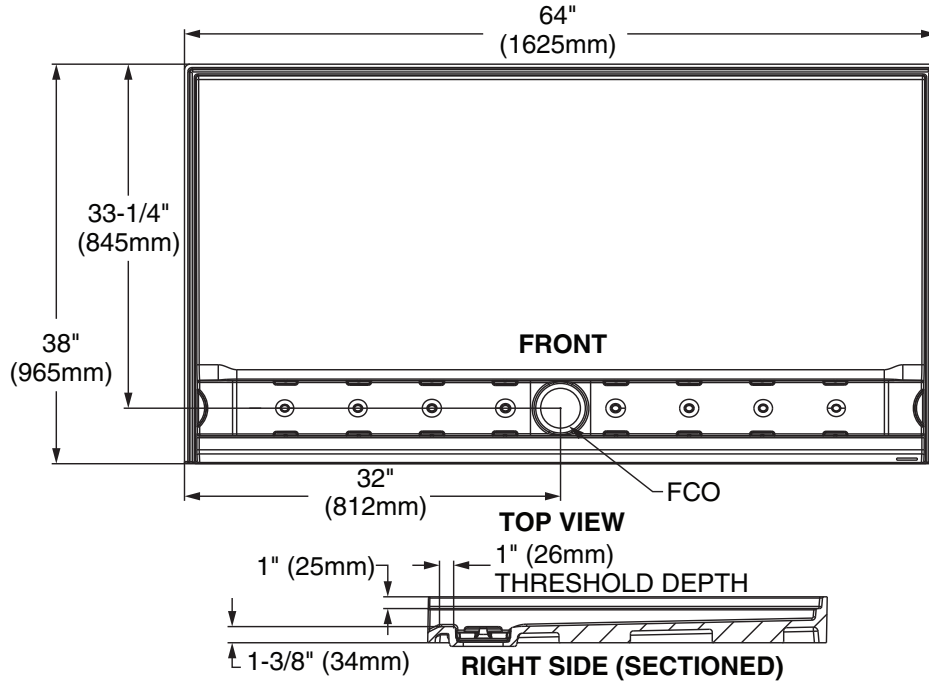

GENERAL SPECIFICATIONS FOR D-146438AM SHOWER BASE	
INSTALLED SIZE	1626mm x 965mm (64 x 38 In.)
WEIGHT	62.8 Kg. (138 Lbs.)
SHOWER WELL AT SUMP	1562mm x 902mm (61-1/2 x 35-1/2 In.)
SHOWER WELL AT RIM	1586mm x 914mm (62-3/8 x 36 In.)
FLOOR LOADING (PROJECTED AREA)	40 Kgs/Sq. m. (8 Lbs./Sq. Ft.)