

see what Delta can do™

HAND SHOWER

■ 2 Setting Hand Shower

FEATURES:


- Touch-Clean® Spray Holes
- Lumicoat™ Finish (-PR models only)
- Lumicoat™ Finishes easily wipe clean without cleaners and chemicals on the products most commonly touched areas

STANDARD SPECIFICATIONS:

- Max flow rate 1.75 gpm @ 80 psi, 6.6 L/min @ 550 kPa
- Certified dual check valves for backflow protection
- Spray settings include: Full Body Spray and ProClean™ Spray

WARRANTY

- Parts and Finish - Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date the product is received by the original purchaser or their authorized representative (installation contractor, etc.).
- Please go to www.deltafaucet.com for the complete details of our limited warranty.

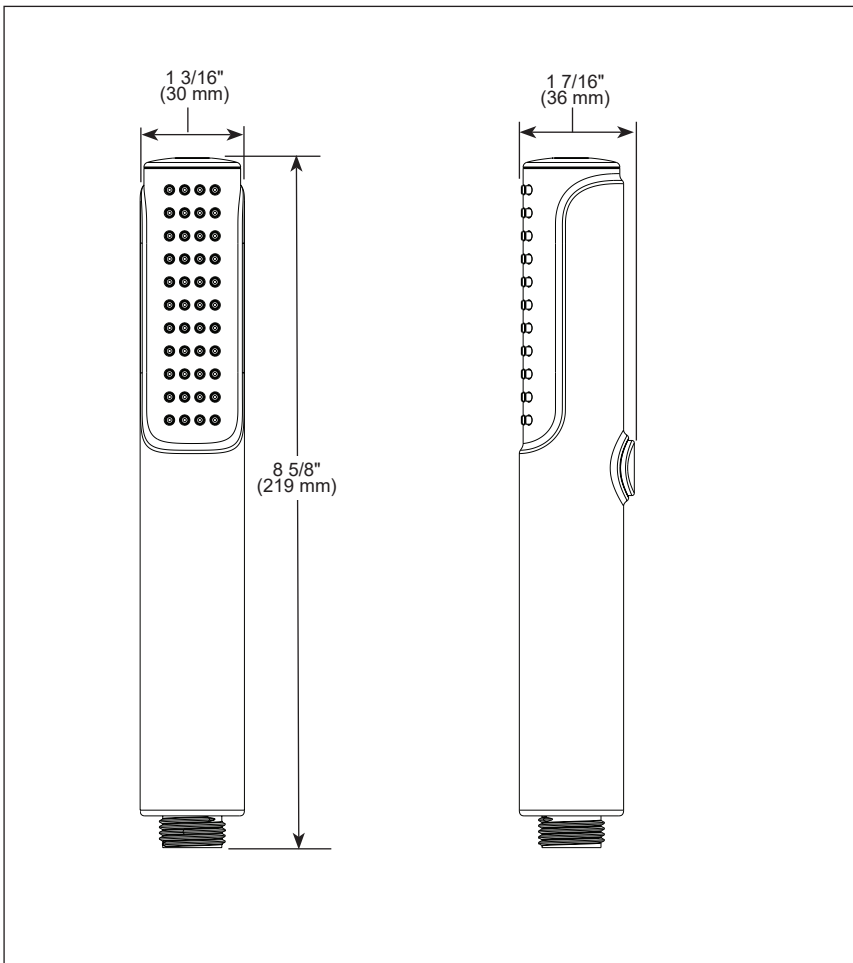

▲ Designate proper finish suffix

COMPLIES WITH:

- ASME A 112.18.1 / CSA B 125.1
- ASME A 112.18.3
- EPA WaterSense®

◆ Your Delta Faucet handshower incorporates a backflow protection system that has been tested to be in compliance with ASME A 112.18.3 and ASME A 112.18.1/CSA B 125.1. It incorporates two certified check valves in series, which operate independently and are integral, non-serviceable parts of the wand assembly.