


PRODUCT SPECIFICATION SHEET

Helios LED Mirror Collection

MRE13036

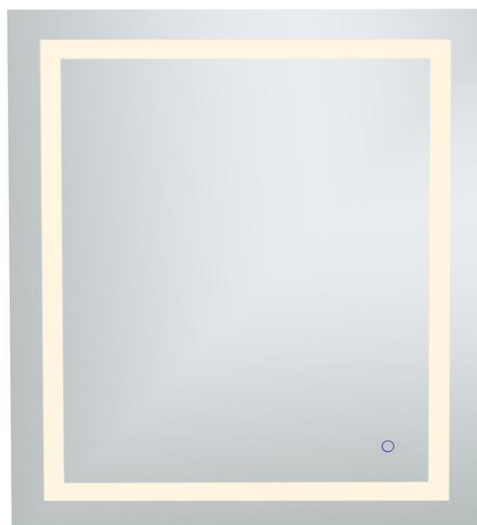

Dimension	36"L x 30"W x 1.1"H
Product Weight	20.7 lbs
Finish	White Frame
Mount type	Wall mounted
Shape	Rectangle
Orientation	Horizontal and Vertical
Framed	Frameless
Material Details	Metal & Glass
Power source type	Hardwired
Lighted	Yes, Front-lit
Bulb Type	LED strip
Magnification	No
Initial Lumens	2700
Delivered Lumens	945 *
LED Color Temperature	4200K+6400K+3000K *
LED Wattage	27W *
Anti-fog Wattage	30.6W
Dimmable (Yes/No)	Yes
Anti-Fog Feature (Yes/No)	Yes *
Touch Sensor (Yes/No)	Yes
Input Voltage	110V-120V *
IP Rating	44 *
Certifications	ETL Approved *
Installation Hardware Included	Yes, 2 french cleats *
Warranty period	1 Year Limited
Shipment Type	Small Parcel

Product Description

The Helios LED hardwired bathroom mirror is the most versatile and aesthetically pleasing for your space. Its bright white/warm white/cool white light is diffused behind an inset of frosted glass, illuminating an even glow. With a touch sensor feature, three different color options can be optimized for your mood. Comes equipped with a dimmer, a truly versatile led mirror. These can be mounted both vertically or horizontal, perfect for over the bathroom vanity. Mounting the hardwire mirror is fairly easy, just install directly to a wall junction box. No need to decide which led color temperature to purchase, this mirror has it all, it's perfect for your modern bathroom needs!

Features

features three color temperature settings with a touch of a button: warm light (3000K), cool light (4200K) and day light (6400K)

smart touch sensor to turn off and on and to change different color temperature. Long press for dimming at each color temperature.

Equipped with a built in defogger. Wattage is as follows: warm light (27W), day light (27W), cool light(27W)

hardwired and backpanel has 8 laser cut holes for easy installation


can be hung both vertical and horizontal position in your bathroom

changeable led strip

backlit mirror with IP44 rating and provides 40,000 hours of life



Dimensional Drawing

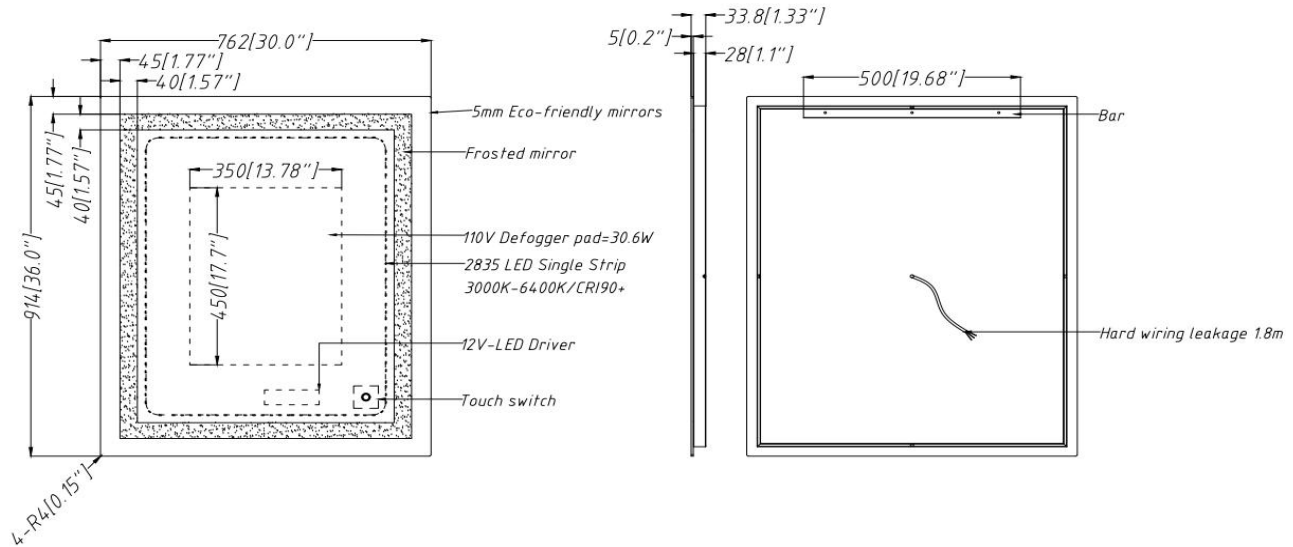

Available sizes

Model Number	Length	Width	Height	Color temperature	LED Wattage	Initial Lumens	Delivered Lumens
MRE11830	30	18	1.33	3000K+4200K+ 6400K	16.5	1650	577.5
MRE11836	36	18	1.33	3000K+4200K+ 6400K	19.5	1950	682.5
MRE12030	30	20	1.33	3000K+4200K+ 6400K	17	1700	595
MRE12036	36	20	1.33	3000K+4200K+ 6400K	20	2000	700
MRE12040	40	20	1.33	3000K+4200K+ 6400K	22	2200	770
MRE12430	30	24	1.33	3000K+4200K+ 6400K	19	1900	665
MRE12436	36	24	1.33	3000K+4200K+ 6400K	22	2200	770
MRE12440	40	24	1.33	3000K+4200K+ 6400K	24	2400	840
MRE12730	30	27	1.33	3000K+4200K+ 6400K	20.5	2050	717.5
MRE12736	36	27	1.33	3000K+4200K+ 6400K	23.5	2350	822.5
MRE12740	40	27	1.33	3000K+4200K+ 6400K	25.5	2550	892.5
MRE13030	30	30	1.33	3000K+4200K+ 6400K	22.5	2250	787.5
MRE13036	36	30	1.33	3000K+4200K+ 6400K	27	2700	945
MRE13040	40	30	1.33	3000K+4200K+ 6400K	28	2800	980
MRE13048	48	30	1.33	3000K+4200K+ 6400K	31.5	3150	1102.5
MRE13072	72	30	1.33	3000K+4200K+ 6400K	45	4500	1575
MRE13636	36	36	1.33	3000K+4200K+ 6400K	29	2900	1015
MRE13640	40	36	1.33	3000K+4200K+ 6400K	31	3100	1085
MRE13648	48	36	1.33	3000K+4200K+ 6400K	35.5	3550	1242.5
MRE13660	60	36	1.33	3000K+4200K+ 6400K	41	4100	1435
MRE13672	72	36	1.33	3000K+4200K+ 6400K	48	4800	1680
MRE14260	60	42	1.33	3000K+4200K+ 6400K	45	4500	1575
MRE14272	72	42	1.33	3000K+4200K+ 6400K	50	5000	1750

