

TUB INCLUDES:

- Anti-vortex safety suction
- Color matched system trim
- HydroOzone ozone sanitation system
- Self draining pump and system
- Integral waste and overflow
- Concealed Drain



Standard Grab Bar



Linear Integral Waste and Overflow



Chromatherapy-LED Lighting System

OPTIONS: ([MORE INFORMATION AVAILABLE ON OUR WEBSITE](#))

- Chromatherapy-LED Lighting System
- Extra High Density
- Grab Bars
 - Standard or Universal
- Hydro Blanket
- Hydro Coat
- Hydro Express Quick Ship
- Island Tub Drain
- Integral Waste and Overflow
 - Linear
- Molded Armrests
- Padded Headrest Pillow

STANDARD ELECTRICAL REQUIREMENTS:

- Thermal Air System | One 15 Amp Dedicated Circuit

All electrical components come standard at 115 volts

All electrical circuits must be GFCI protected

Thermal Air System requires remote blower. Comes standard with 5ft of flexible pipe for remote installation

AS SHOWN:

Acrylic Tub

FEATURES SHOWN:

- Grab Bar

ALSO AVAILABLE:

- Soaking tub only
- Thermal Air

SIZE:

66.36.20

WATER CAPACITY:

75 Gallons

WEIGHT:

150 lbs. Tub Only

180 lbs. Thermal Air




MODEL 6636 DIMENSIONS:

- (L)ength- 66"
- (W)idth- 36"
- (H)eight Finish- 20"



ACRYLIC TUB

- Acrylic models finished in 1/8" thick layer of deep lustrous acrylic
- Extra thick reinforced fiberglass
- Pre-wired pump on pump platform (standard pump location only)
- Integral E-Z level platform facilitates installation
- Integral waste and overflow

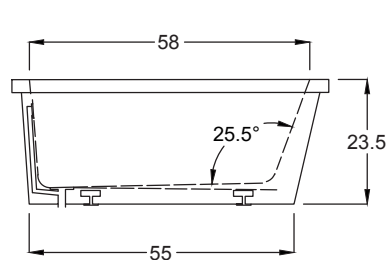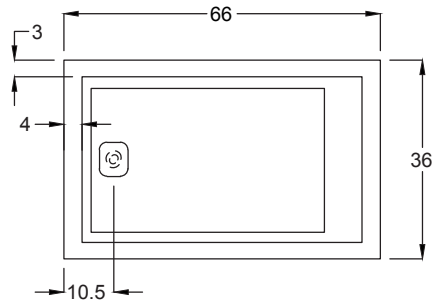

CODES AND COMPLIANCES

Massachusetts code File no: P1-0614-491

