



5432MT

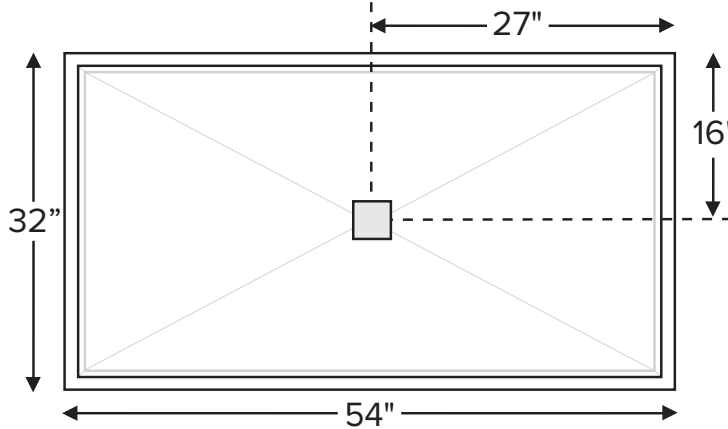

When ordering, please specify tile flange locations.

54" x 32" x 3" (exterior bottom of base)	
MULTIPLE, LOW-PROFILE THRESHOLD smooth floor	
Center Drain	
<b>Acrylic CXL™</b>	<b>DoloMatte™</b>
135 lbs / 61 kg	152 lbs / 69 kg



Model #	Material	Color / Finish	MSRP
SB5432MT	Acrylic CXL™	White (CWH) or Biscuit (CBS) / Gloss	<b>\$1,930</b>
SBDM5432MT	DoloMatte™	White (CWH) / Matte	<b>\$2,330</b>

Must specify color code on order. DoloMatte available in white only.

**Options** *Must be ordered at time of purchase*

**Quick Ship (QSPRI) \$430**

Reduces lead time. Please call for availability.

**Radiance® (RAD100) \$1,595** Shower floor heating system. Radiance heating grids are fully integrated within the acrylic shell structure of the shower floor. Requires a 110-volt, 15 amp GFCI and remote installation of control box & keypad.

**Pre-Levelled Foam Base (PLFSB) \$220**

**PVC Drain Kit Finishes** Chrome included with shower base

Brushed Nickel upcharge (SBSQDBN) **\$125**

Special Finishes upcharge\* (SBSQDSF) **\$750**

\*Must send finish sample and allow 3-4 weeks additional lead time.

**Accessories**

**Drain Kit Options**

Solid Brass Drain Kit with Stainless Steel Trim (SBSQDSB) **\$195**

**Teak Shower Seat**

Premium

Natural Stainless (TK-SSEAT2416BNS) **\$3,035**

High-Polished Stainless (TK-SSEAT2416BHP) **\$3,465**

Standard

Natural Stainless (TK-SSEAT2215NS) **\$1,125**

High-Polished Stainless (TK-SSEAT2215HP) **\$1,575**

**Teak Bath Mat (TKMAT3018) \$815** Measures 30" x 17.5" x 1"

Custom sizes also available. Contact MTI for details.

**Teak Shower Tray (TK5432MT)**

**Contact MTI for pricing**



Factory-installed tile flange is 3/16" thick.

Account for this thickness when planning final opening size.

**IMPORTANT ORDERING & INSTALLATION INFORMATION**

- Factory-installed tile flange on 1, 2 or 3 sides to facilitate installation. Must specify tile flange location(s) on order.
- 3.5" drain opening pre-drilled.
- Dimensions provided represent the length and width of the bottom of the base without tile flange. See Installation Instructions.
- Add proper wet-bedding compound to fully support bottom of shower base. Optional factory installed Pre-Levelled Foam Base negates the need to wet bed when installing on a flat, level subfloor. See installation instructions.
- All bases are in accordance with CSA B45.5/IAPMO Z124 standard and compliant with ASTM C 1028-07 coefficient of friction. Dolomatte bases meet ANSI A137.1/A326.3 coefficient of friction and AS HB198:2014 pendulum slip resistance testing.

• Options and accessories may be packaged inside the box. Always check packaging before discarding.  
 • All product measurements are ±1/2".  
 • Specifications and configurations are subject to change without notice.  
 • Measurements herein supersede all others published prior to publication date below.

See the Installation & Operation Manual for more details.

MTI's Customer Service: Monday-Friday 8am-6pm EST

**800-783-8827** or [service@mtibaths.com](mailto:service@mtibaths.com)

CSA # MTSB-5432MT

HURL # MTSB-DM5432MT

©2022 by MTI Baths, Inc. Modification Rights Reserved

