




# Designer Collection Shower Bases

## MTSB-6032BF

59.5" x 32" x 1.75"

### GENERAL SPECIFICATIONS

Material - Acrylic CXL™  
 Shipping Weight - 115 lbs / 52 kg  
 Threshold - Barrier-Free  
 Drain Location - Center  
 Floor - Textured

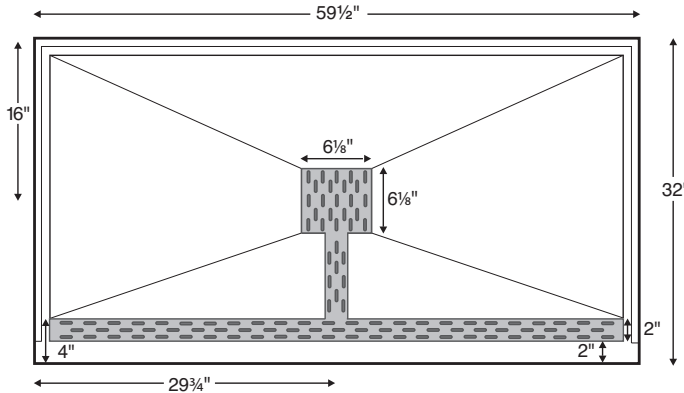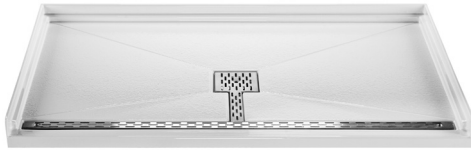

Designed to be recessed into floor, to create a flat transfer surface.

Model #	Package Content	Size	Shape	MSRP
SB6032BF	Natural stainless steel drain and channel cover, PVC drain kit	59.5" x 32" x 1.75"	Rectangle	<b>\$2,560</b>

Options <i>Must be ordered at time of purchase</i>
<b>Color</b> Please specify color on order White (CWH) Biscuit (CBS)
<b>Quick Ship (QSPRI) \$430</b> Reduces lead time. Please call for availability.
<b>Radiance® (RAD100) \$1,595</b> Shower floor heating system. Radiance heating grids are fully integrated within the acrylic shell structure of the shower floor. Requires a 110-volt, 15 amp GFCI and remote installation of control box & keypad.
<b>Pre-Levelled Foam Base (PLFSB) \$220</b>
<b>Drain &amp; Channel Cover</b> Natural stainless steel drain & channel installed on base as standard. Substitute with the following available options: Powder Coated White Stainless Steel Hidden Drain Cover (DCT60W) Must specify part code on order; comes in lieu of standard cover.

Accessories
<b>Drain Kit Options</b> Solid Brass Drain Kit with Stainless Steel Cover (SBDKSB) <b>\$195</b>
<b>Teak Shower Seat</b> Premium Natural Stainless (TK-SSEAT2416BNS) <b>\$3,035</b> High-Polished Stainless (TK-SSEAT2416BHP) <b>\$3,465</b> Premium ADA Natural Stainless (TK-SSEAT2416BNSA) <b>\$3,630</b> High-Polished Stainless (TK-SSEAT2416BHPA) <b>\$4,155</b> Standard Natural Stainless (TK-SSEAT2215NS) <b>\$1,125</b> High-Polished Stainless (TK-SSEAT2215HP) <b>\$1,575</b>

### IMPORTANT ORDERING & INSTALLATION INFORMATION

- Zero-barrier single front threshold designed for ease of transfer between bathroom and shower area.
- 3-sided integral tile flange to facilitate installation.
- 3.5" drain opening pre-drilled.
- Drain finish options on this sheet are upcharge prices only. Contact MTI for ordering details for drain kits sold separately.
- Compliant with ASTM C 1028-07 coefficient of friction test.
- Add proper wet-bedding compound to fully support bottom of shower base. Optional factory installed Pre-Levelled Foam Base negates the need to wet bed when installing on a flat, level subfloor. See installation instructions.

• Options and accessories may be packaged inside the box. Always check packaging before discarding.  
 • All product measurements are ±1/2".  
 • Specifications and configurations are subject to change without notice.  
 • Measurements herein supersede all others published prior to publication date below.

See the Installation & Operation Manual for more details.  
 MTI's Customer Service: Monday-Friday 8am-6pm EST  
**800-783-8827** or [service@mtibaths.com](mailto:service@mtibaths.com)

CSA # MTSB-6032BF

©2022 by MTI Baths, Inc. Modification Rights Reserved



Rev. 01 19 2022