




Designer Collection Shower Bases

MTSB-6036BF

59.5" x 36" x 1.75"

GENERAL SPECIFICATIONS

Material - Acrylic CXL™
 Shipping Weight - 115 lbs / 52 kg
 Threshold - Barrier-Free
 Drain Location - Center
 Floor - Textured

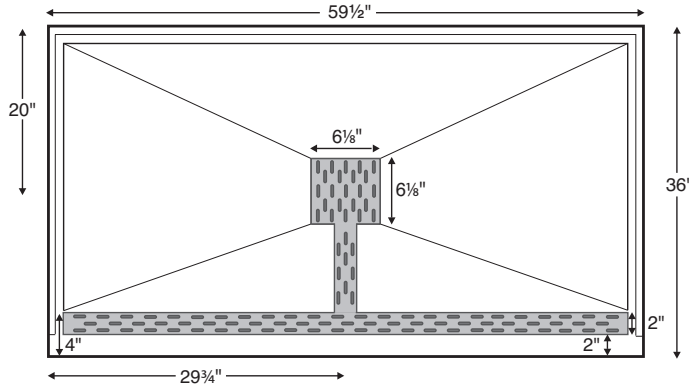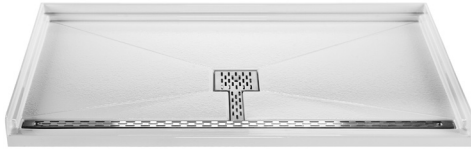

Designed to be recessed into floor, to create a flat transfer surface.

Model #	Package Content	Size	Shape	MSRP
SB6036BF	Natural stainless steel drain and channel cover, PVC drain kit	59.5" x 36" x 1.75"	Rectangle	\$2,570

Options <i>Must be ordered at time of purchase</i>
Color Please specify color on order White (CWH) Biscuit (CBS)
Quick Ship (QSPRI) \$430 Reduces lead time. Please call for availability.
Radiance® (RAD100) \$1,595 Shower floor heating system. Radiance heating grids are fully integrated within the acrylic shell structure of the shower floor. Requires a 110-volt, 15 amp GFCI and remote installation of control box & keypad.
Pre-Levelled Foam Base (PLFSB) \$220
Drain & Channel Cover Natural stainless steel drain & channel installed on base as standard. Substitute with the following available options: Powder Coated White Stainless Steel Hidden Drain Cover (DCT60W) Must specify part code on order; comes in lieu of standard cover.

Accessories
Drain Kit Options Solid Brass Drain Kit with Stainless Steel Cover (SBDKSB) \$195
Teak Shower Seat Premium Natural Stainless (TK-SSEAT2416BNS) \$3,035 High-Polished Stainless (TK-SSEAT2416BHP) \$3,465 Premium ADA Natural Stainless (TK-SSEAT2416BNSA) \$3,630 High-Polished Stainless (TK-SSEAT2416BHPA) \$4,155 Standard Natural Stainless (TK-SSEAT2215NS) \$1,125 High-Polished Stainless (TK-SSEAT2215HP) \$1,575

IMPORTANT ORDERING & INSTALLATION INFORMATION

- Zero-barrier single front threshold designed for ease of transfer between bathroom and shower area.
- 3-sided integral tile flange to facilitate installation.
- 3.5" drain opening pre-drilled.
- Drain finish options on this sheet are upcharge prices only. Contact MTI for ordering details for drain kits sold separately.
- Compliant with ASTM C 1028-07 coefficient of friction test.
- Add proper wet-bedding compound to fully support bottom of shower base. Optional factory installed Pre-Levelled Foam Base negates the need to wet bed when installing on a flat, level subfloor. See installation instructions.

• Options and accessories may be packaged inside the box. Always check packaging before discarding.
 • All product measurements are ±1/2".
 • Specifications and configurations are subject to change without notice.
 • Measurements herein supersede all others published prior to publication date below.

See the Installation & Operation Manual for more details.
 MTI's Customer Service: Monday-Friday 8am-6pm EST
800-783-8827 or service@mtibaths.com

CSA # MTSB-6036BF

©2022 by MTI Baths, Inc. Modification Rights Reserved



Rev. 01 19 2022