KALLISTA®

Foundations by KALLISTA

Thermostatic rough-in with volume control & stops

P29500-WS

Features

- Brass valve body
- One-piece diaphragm cartridge design for ease of maintenance
- Single-lever design cycles from off through cold to hot with integrated volume control
- Thermostatic technology automatically maintains outlet temperature during water pressure fluctuations and/or inlet water temperature changes
- Features a high-temperature-limit stop to help prevent scalding
- 9 gpm (34 l/min) maximum flow rate at 45 psi



Optional Products/Accessories

K-10350 Deep rough-in kit
K-10351 Test cap for K-8300 Series valve bodies

Codes/Standards

ASME A112.18.1/CSA B125.1
ASSE 1016/ASME A112.1016/CSA B125.16
NOM Standards
NOM 012-CONAGUA

KALLISTA® Five-Year Limited Warranty


See website for detailed warranty information.

KALLISTA

Foundations by KALLISTA

Thermostatic rough-in with volume control & stops

P29500-WS

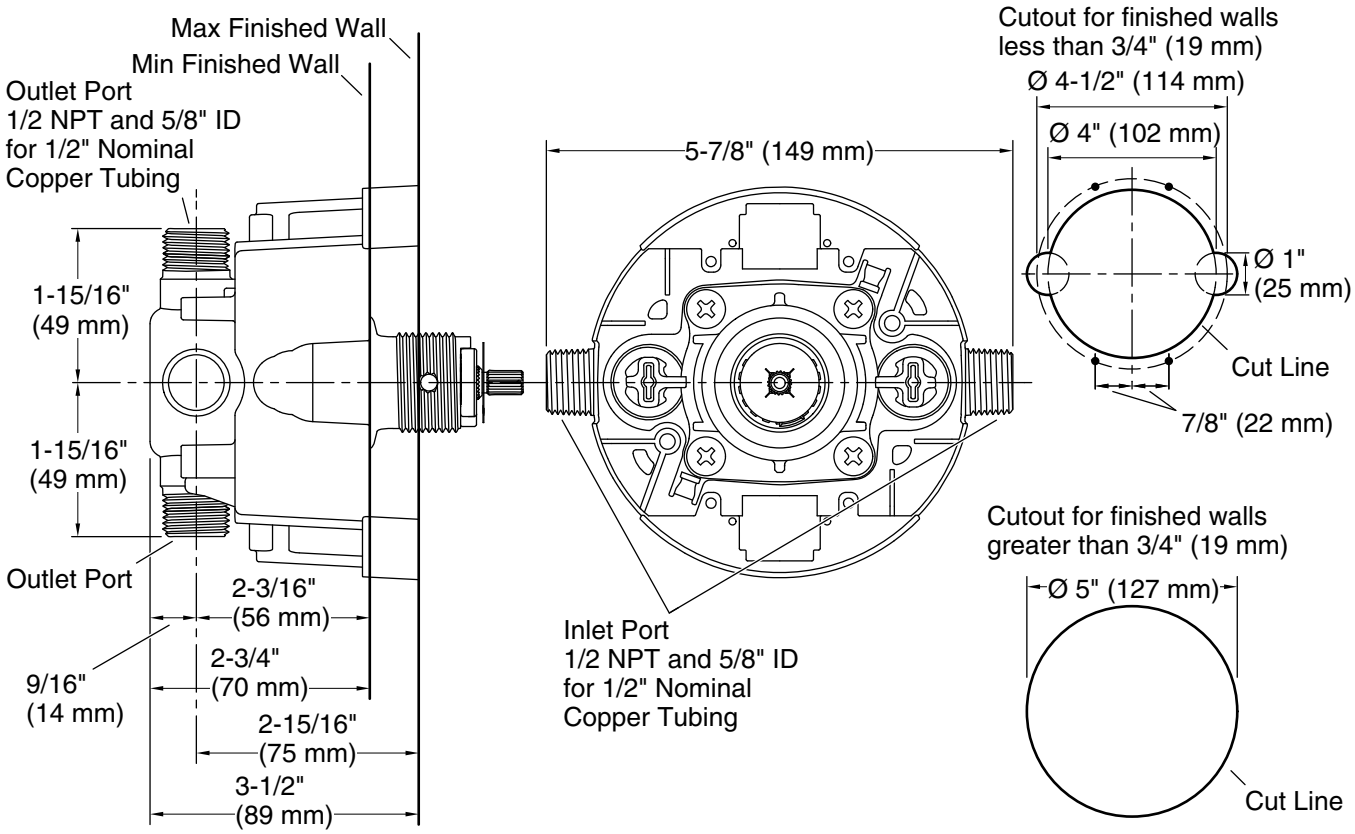

Technical Information

All product dimensions are nominal.

Shower Valve:

Flow Rate (Max) @ 45 psi	9 gal/min (34.1 l/min)
Manufacturer's minimum rated flow:	1.5 gal/min (5.7 l/min)
Pressure:	45 psi (3.1 bar)
Maximum (Static) Pressure:	125 psi (8.6 bar)
Minimum (Operating) Pressure:	20 psi (1.4 bar)