KALLISTA

Foundations by KALLISTA
Eco Transfer Shower Trim Rough In
P32997-00

Features
- Brass valve body
- Eco-friendly diverter easily switches water flow from one function to another
- Can be used in 1-, 2-, and 3-outlet configurations
- Single-handle control
- 3/4" female NPT inlet
- Includes rough-in



Recommended Products/Accessories
P33490-LV Aileron™ Eco Transfer Trim
P33360-00 Bezel™ Eco Transfer Trim
P33360-GTM Bezel™ Eco Transfer Trim, Guatemala Stone Handle
P33360-NM Bezel™ Eco Transfer Trim, Nero Marquina Handle
P33360-WC Bezel™ Eco Transfer Trim, White Carrara Handle
P32995-00 Thermostatic Shower Trim Rough In

Codes/Standards
ASME A112.18.1/CSA B125.1
ASSE 1016/ASME A112.1016/CSA B125.16


KALLISTA® Five-Year Limited Warranty
See website for detailed warranty information.


KALLISTA

Foundations by KALLISTA

Eco Transfer Shower Trim Rough In

P32997-00

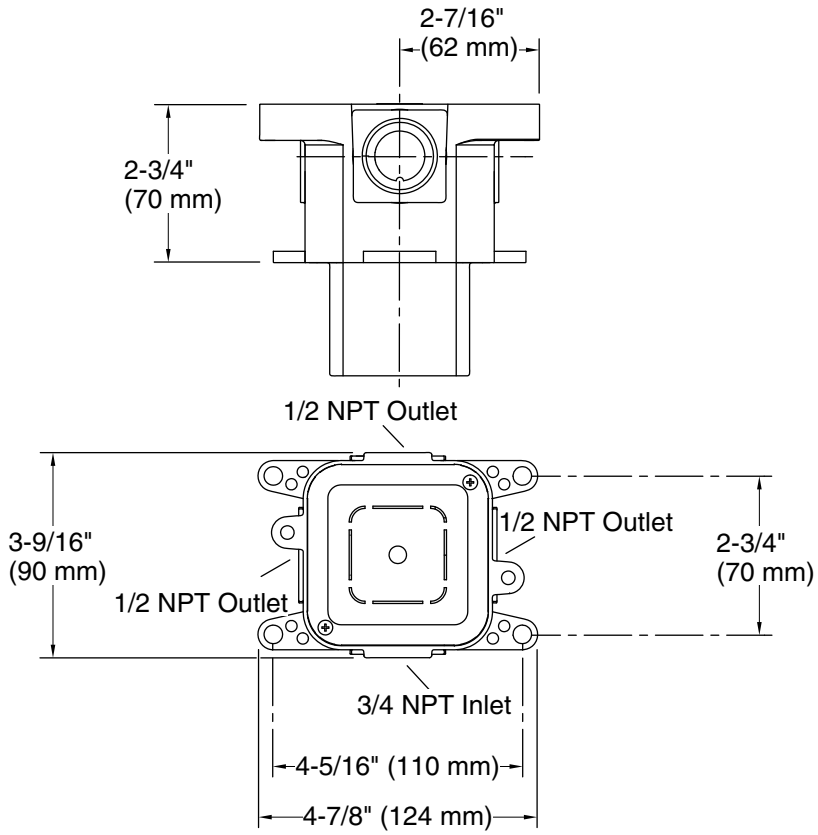

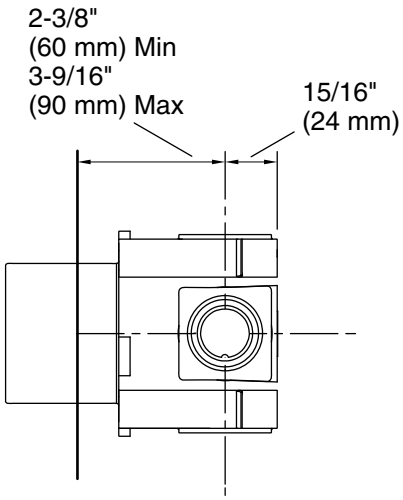

Technical Information

All product dimensions are nominal.

Shower Valve:

Flow Rate (Max) @ 45 psi	5.5 gal/min (20.8 l/min)
Manufacturer's minimum rated flow:	1.75 gal/min (6.6 l/min)
Pressure:	45 psi (3.1 bar)
Maximum (Static) Pressure:	125 psi (8.6 bar)
Minimum (Operating) Pressure:	15 psi (1 bar)

Notes

Follow the installation dimensions precisely as there is no deep roughing in kit available for this product

For use with showerheads or handsprays rated at 1.75 gal/min (6.6 l/min) or higher.