KALLISTA®

Foundations by KALLISTA
Stacked Thermostatic Shower Trim Rough In
P32999-00

Features
- Brass valve body
- Includes rough-in
- Eco-friendly diverter easily switches water flow from one function to another
- Can be used in 1-, 2-, and 3-outlet configurations
- Features a high-temperature-limit stop to help prevent scalding
- Integral shut-off valve stops
- 3/4" female NPT inlet connections



Recommended Products/Accessories
P33494-00 Aileron™ Stacked 1-Outlet Thermostatic Trim
P33495-00 Aileron™ Stacked 2-Outlet Thermostatic Trim
P33496-00 Aileron™ Stacked 3-Outlet Thermostatic Trim
P33363-00 Bezel™ Stacked 1-Outlet Thermostatic Trim
P33364-00 Bezel™ Stacked 2-Outlet Thermostatic Trim
P33365-00 Bezel™ Stacked 3-Outlet Thermostatic Trim

Codes/Standards
ASME A112.18.1/CSA B125.1
ASSE 1016/ASME A112.1016/CSA B125.16


KALLISTA® Five-Year Limited Warranty
See website for detailed warranty information.

KALLISTA

Foundations by KALLISTA

Stacked Thermostatic Shower Trim Rough In

P32999-00

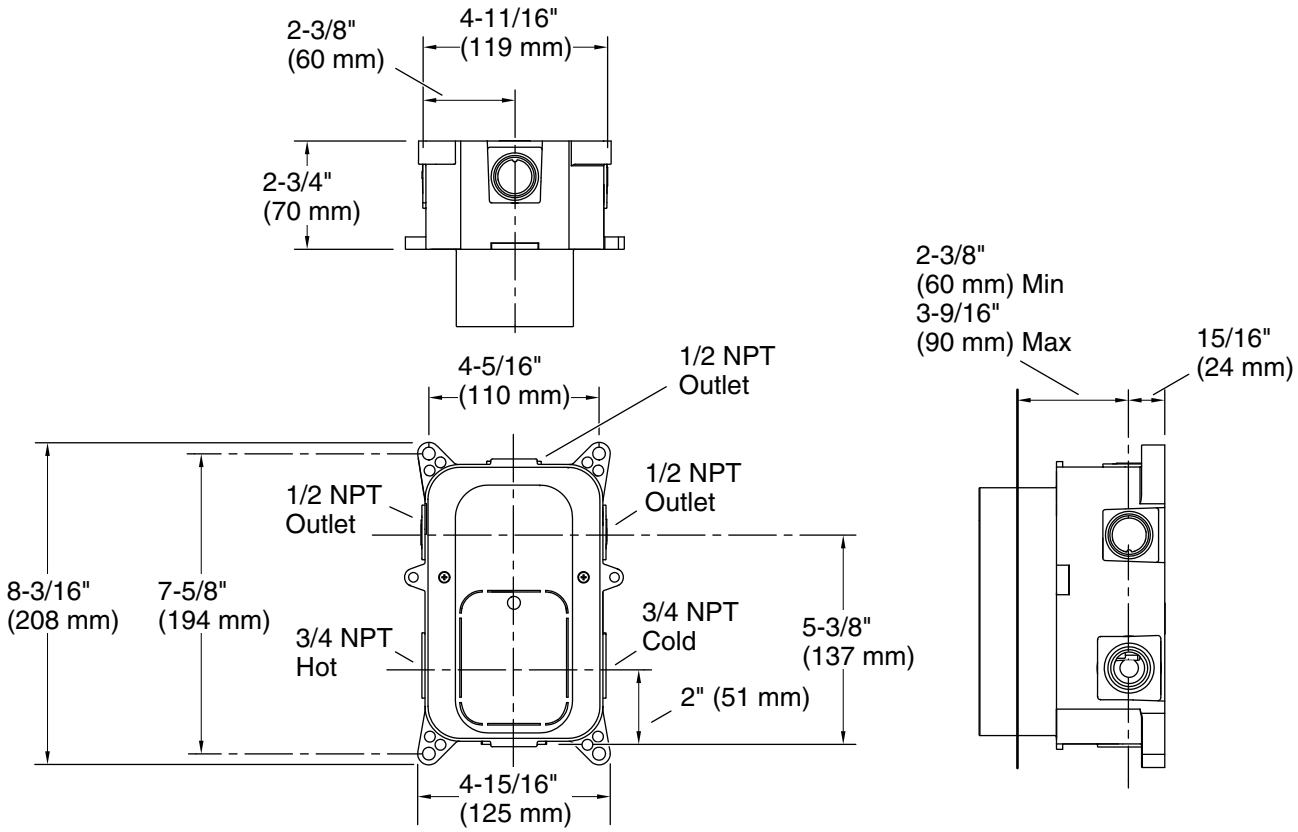

Technical Information

All product dimensions are nominal.

Shower Valve:

Flow Rate (Max) @ 45 psi	6.3 gal/min (23.8 l/min)
Manufacturer's minimum rated flow:	1.75 gal/min (6.6 l/min)
Pressure:	45 psi (3.1 bar)
Maximum (Static) Pressure:	125 psi (8.6 bar)
Minimum (Operating) Pressure:	15 psi (1 bar)

Notes

Follow the installation dimensions precisely as there is no deep roughing in kit available for this product

For use with showerheads or handsprays rated at 1.75 gal/min (6.6 l/min) or higher.