

Drop-In Soaking Bathtub:

- Minimalist design with contoured backrest
- Acrylic with fiberglass reinforcement
- Pre-leveled tub bottom
- Drop-in or under-mount installation
- Zero-Edge low-profile 0.5" deck height



Nominal Dimensions:


66" x 36" x 22-1/2"
(1676 x 914 x 572mm)

Compliance Certifications - Meets or Exceeds the Following Specifications:

- ANSI Z124.1 for Plastic Bathtubs

SEE REVERSE SIDE FOR ROUGHING-IN DIMENSIONS AND PRODUCT SPECIFICATIONS

MODEL 220AS9380-D0

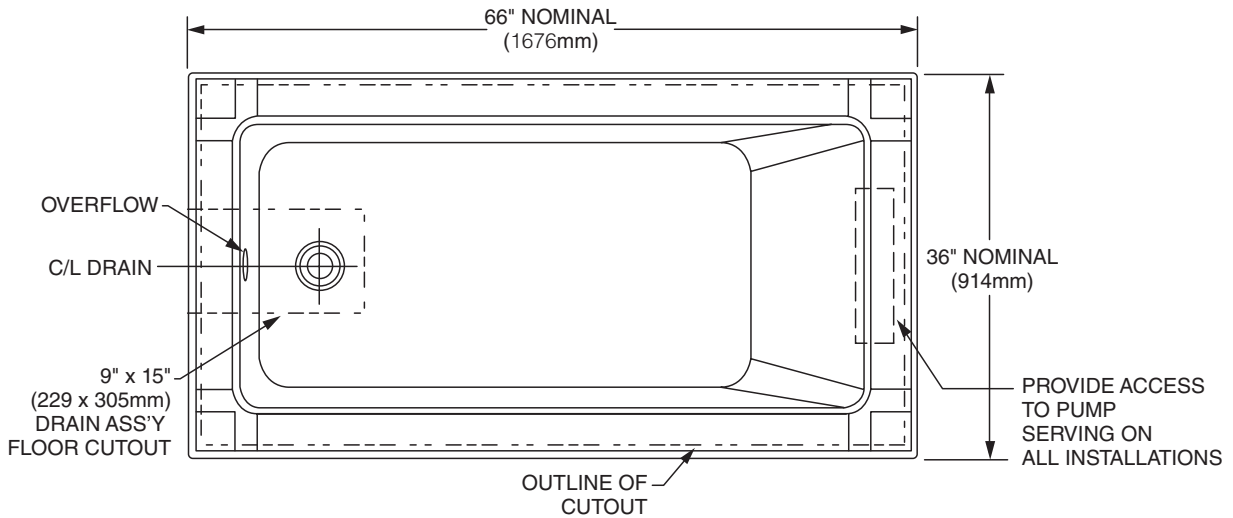

GENERAL SPECIFICATIONS FOR MODEL 220AS9380-D0 FERREN	
INSTALLED SIZE _____	66 x 36 x 21-1/2 In. (1676 x 914 x 546mm)
WEIGHT _____	65 Lbs. (29 Kg.)
WEIGHT w/WATER _____	731 Lbs. (332 Kg.)
GAL. TO OVERFLOW _____	80 Gal. (303 L)
BATHING WELL AT SUMP _____	40-1/4 x 24 In. (1022 x 610mm)
BATHING WELL AT RIM _____	57 x 27 In. (1448 x 686mm)
WATER DEPTH TO OVERFLOW _____	15-1/8 In. (384mm)
FLOOR LOADING _____	44 Lbs./Sq.Ft. (216 Kgs./Sq.m)
(PROJECTED AREA)	
PTS. _____	25.6
CUBE (FT ³) _____	44.5

NOTES:

BATH CAN BE INSTALLED EITHER ABOVE OR BELOW FLOOR LINE AS PIER, ISLAND, OR PENINSULA TYPE INSTALLATION. SUMP OF BATH IS SUPPORTED BY INTEGRAL FEET. NO ADDITIONAL SUPPORT REQUIRED. ENCLOSING MATERIAL BY OTHERS.

REFER TO INSTALLATION INSTRUCTIONS SUPPLIED FOR ADDITIONAL INFORMATION.

FITTINGS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.

PROVIDE SUITABLE REINFORCEMENT FOR ALL SUPPORTS.

IF INSTALLING A DECK-MOUNTED FITTING, BEFORE DRILLING ANY HOLES: CHECK FOR INTERFERENCE WITH DRAIN OVERFLOW, AND APRON INSTALLATION. MOUNTING HOLES DRILLED BY INSTALLER.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard Z124.1. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.