

Drop-In Soaking Bathtub:

- Minimalist design with contoured backrest
- Acrylic with fiberglass reinforcement
- Pre-leveled tub bottom
- Drop-in or under-mount installation
- Zero-Edge low-profile 0.5" deck height



Nominal Dimensions:

72" x 36" x 22-1/2"


(1829 x 914 x 572mm)

Compliance Certifications - Meets or Exceeds the Following Specifications:

- ANSI Z124.1 for Plastic Bathtubs


SEE REVERSE SIDE FOR ROUGHING-IN DIMENSIONS AND PRODUCT SPECIFICATIONS

SPECIFICATIONS:

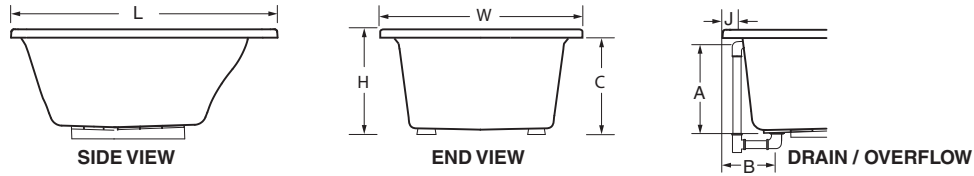

GENERAL SPECIFICATIONS FOR FERREN 6' X 36" DROP-IN BATHTUB

Description	Deck Trim Option	Dimensions L-W-H	Drain / Overflow	Height to Underside of Deck: C	Cut Out Pier G x F	Rough-In Recess E x D	Weight with Water / Floor Loading	Product Weight	Gallon to Overflow
220AS9400-D0 Ferren 6' x 36"	Zero (5/8")	L 71-1/2" (1816mm) W 35-1/2" (902mm) H 22-1/2" (572mm)	A 17-3/4" (451mm) B 10-3/4" (273mm)	C 21-7/8" (556mm)	70" (1778mm) x 34" (864mm)	71-11/16" (1821mm) x 34" (864mm)	846 lb. (384 kg)/ 47 lb./sq.ft. (230 kg/sq.m)	105 lb. (231 kg.)	89 gal. (337 L.)

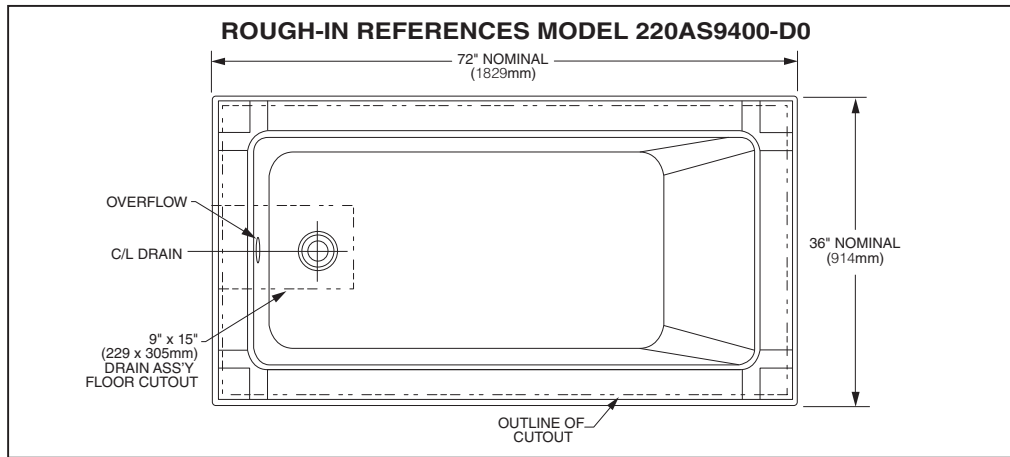

GENERAL SPECIFICATIONS FOR 220AS9400-D0 FERREN	
INSTALLED SIZE	72 x 36 x 22-1/2 In. (1829 x 914 x 572mm)
WEIGHT	105 Lbs. (48 Kg.)
WEIGHT w/WATER	846 Lbs. (384 Kg.)
GAL. TO OVERFLOW	89 Gal. (337 L)
BATHING WELL AT SUMP	52-1/4 x 24 In. (1327 x 610mm)
BATHING WELL AT RIM	63 x 27 In. (1600 x 686mm)
WATER DEPTH TO OVERFLOW	14 In. (356mm)
FLOOR LOADING	47 Lbs./Sq.Ft. (230 Kgs./Sq.m)
(PROJECTED AREA)	
PTS.	25.6
CUBE (FT³)	48.3

NOTES:

BATH CAN BE INSTALLED EITHER ABOVE OR BELOW FLOOR LINE AS PIER, ISLAND, OR PENINSULA TYPE INSTALLATION. SUMP OF BATH IS SUPPORTED BY INTEGRAL FEET. NO ADDITIONAL SUPPORT REQUIRED. ENCLOSING MATERIAL BY OTHERS.

REFER TO INSTALLATION INSTRUCTIONS SUPPLIED FOR ADDITIONAL INFORMATION.

FITTINGS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.

PROVIDE SUITABLE REINFORCEMENT FOR ALL SUPPORTS.

IF INSTALLING A DECK-MOUNTED FITTING, BEFORE DRILLING ANY HOLES: CHECK FOR INTERFERENCE WITH DRAIN OVERFLOW, AND APRON INSTALLATION. MOUNTING HOLES DRILLED BY INSTALLER.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard Z124.1. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.