

MW7763074CSG

Drake[®] WASHLET[®]+ C2 Two-Piece Toilet - 1.6 GPF

FEATURES

- Concealed supply connection for seamless installation
- TORNADO FLUSH[®] system, (1.6 GPF/6.0 LPF)
- CEFIONTECT[®] ceramic glaze minimizes waste from sticking to porous, ceramic surfaces
- 12" Rough-in, supply line sold separately
- Chrome plated trip lever
- Elongated front bowl and WASHLET+ C2 and tank set
- EWATER+® auto-cleans wand
- On-demand remote function cleans wand with EWATER+
- PREMIST[®] of bowl before each use
- Convenient arm control panel

MODELS

- MW7763074CSG (#01) With CEFIONTECT ceramic glaze, WASHLET+ C2
- C776CEGT40
 Elongated bowl with CEFIONTECT
- ST776SA
- Tank and cover only
- **SW3074T40** WASHLET+ C2


OPTIONAL COMPONENTS

• THU808(#01, #03, #11, #12, #51, #PN, #BN, #RB)-A Trip Lever - Cotton, Bone, Colonial White, Sedona Beige, Ebony, Polished Nickel, Brushed Nickel, Oil Rubbed Bronze)

COLORS/FINISHES

• #01 Cotton





PRODUCT SPECIFICATION

The two-piece TORNADO FLUSH toilet shall be 1.6 GPF/6.0 LPF. Regular Height Toilet with CEFIONTECT glaze finish. Toilet shall have high-profile tank, elongated front bowl and chrome trip lever. Toilet shall be TOTO Model MW7763074CSG#01. See TOTO Specification sheet SW3074T40 for details on required WASHLET.

CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1
- Certifications: IAPMO(cUPC[®])
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others



Drake[®] WASHLET[®]+ C2 Two-Piece Toilet - 1.6 GPF

SPECIFICATIONS

DIMENSIONS


Water Use	1.6 GPF (6.0 LPF)
Flush System	TORNADO FLUSH®
Min. Water Pressure	8 psi (Flowing)
Water Surface	9" x 6-7/8"
Trap Diameter	2-1/8"
Rough-in	12"
Trap Seal	2-1/8"
Warranty	One Year Limited Warranty
Material	Vitreous China
Shipping Weight	C776CEGT40 57 lbs. ST776SA 32 lbs.
Shipping Dimensions	C776CEGT40 29-3/4" L x 15" W1 x 10-5/8" W2 x 16-1/4" H ST776SA 18-3/4" L x 8-7/8" W x 16-1/4" H

See SW3074T40 Specification Sheet for details on included WASHLET.


INSTALLATION NOTES

Back-to-Back Toilet Installations:

TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.



To maintain adequate wall gap between the back of the tank and wall, mount the floor flange at a nominal 12" rough-in distance.

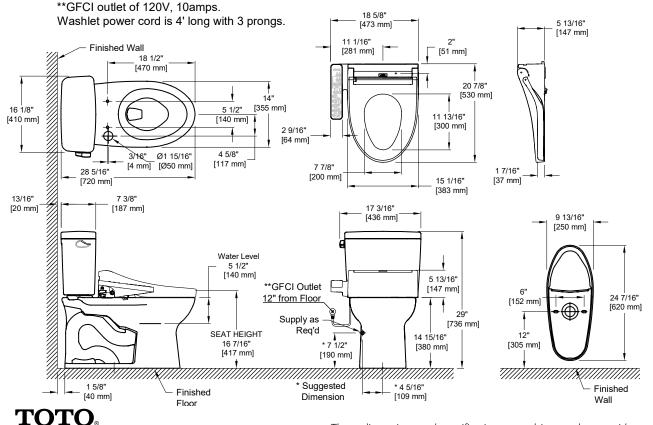

These dimensions and specifications are subject to change without notice