# **Arris™ Technical Specification**

# Grab Bar

YG0812/YG0818/YG0824/YG0836/YG0842

### **Stock Numbers:**

- □ YG0812CH 12" Grab Bar Chrome Finish
- □ YG0818CH 18" Grab Bar Chrome Finish
- □ YG0824CH 24" Grab Bar Chrome Finish
- □ YG0836CH 36" Grab Bar Chrome Finish
- □ YG0842CH 42" Grab Bar Chrome Finish
- ☐ YG0812BN 12" Grab Bar Brushed Nickel Finish
- YG0818BN 18" Grab Bar Brushed Nickel Finish
- □ YG0824BN 24" Grab Bar Brushed Nickel Finish
- ☐ YG0836BN 36" Grab Bar Brushed Nickel Finish
- ☐ YG0842BN 42" Grab Bar Brushed Nickel Finish


### **Materials:**

**Grab Bar posts and bars** are constructed of stainless steel.

## Compliance:

- ADA, ANSI, ASTM, CSA
- Tested to 500 lbs. pull

## **Dimensions:**

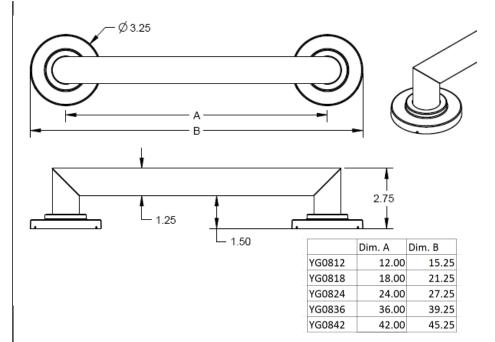

### **Installation Instructions:**

- 1. Please note that screws MUST be mounted into a wood stud for secure installation.
- Decide whether you would like to position your grab bar horizontally, vertically or at an angle, remembering that BOTH ends of the grab bar MUST be positioned over a wood stud (unless using secure mount anchors).
- For easier installation and mounting remove 3 setscrews from each flange and remove bar from SecureMount™ Flange.
- 4. Remove cover and re-assemble flange to bar by tightening 3 set screws.
- 5. Place grab bar and mark three mounting locations on each of the two grab bar flanges with a pencil.
- 6. Drill 1/8 diameter pilot holes at each screw location. Make sure to drill into the stud.
- Install 3 screws and washers each SecureMount™ flange and tighten until secure. If desired, apply silicone caulk to the back of the SecureMount™ plate to guard against water penetration.
- After screws are installed each side, dis-assemble bar from SecureMount™ flange by removing set screws.
- 9. Re-install covers.
- 10. Place bar over SecureMount™ flanges and tighten all set screws.
- 11. Snap on covers.

## **Cleaning Instructions:**

To preserve the fine finish of this product, clean only with a soft damp cloth. Dry well. Do not use commercial or abrasive cleaners.

Stock Number:\_\_\_\_\_Grab Bar
By Creative Specialties



25300 AL MOEN DRIVE • NORTH OLMSTED, OH 44070 CORPORATE HEADQUARTERS: (800) 321-8809 • FAX: (800) 848-6636 INTERNATIONAL: (440) 962-2000 • FAX: (440) 962-2726 CUSTOMER SERVICE (USA): 800-882-0116 • FAX: (888) 379-2720 WWW.CSI.MOEN.COM